

ONGA®

500 SERIES

MOULDED JET FARMMASTER PUMP
JET ASSISTED PRESSURE PUMP



543/544



FEATURES

Industrial grade corrosion resistant thermoplastic.

No moving parts down bore.

Built-in check valve.

Shallow well lifts to 7.6m.

Manual or automatic system.

Max. head - 41m.

Max. flow - 118lpm.

APPLICATIONS

- Domestic, industrial or rural pressure pump for use as a manual or an automatic pressure system.
- Stock watering, irrigation and water transfer.
- Option of a large range of water sources including tanks, bores, dams, creeks and rivers.

PUMP INFORMATION

Horizontal, single-stage, surface mounted centrifugal pump. Jet and venturi assisted performance with closed impeller for pumping debris free water. Noryl pump casing with 1¼" BSP (male) inlet and ¾" BSP (female) outlet.

OPERATING CONDITIONS

Suitable for pumping clean non-aggressive liquids without solids or fibres in suspension.

Fluid:	Water.
Maximum water temperature:	55°C.
Minimum water temperature:	1°C.
Maximum ambient temperature:	40°C.

ELECTRICAL DATA

Type	Type of current	Voltage $\pm 10\%$	Frequency Hz	Motor rating kW		Nominal RPM	Current ampere	Locked rotor current	Motor protection	Insulation class	IP rating
				P1	P2						
543	1-phase	230	50	1.4	1.1	2900	6.4 A	42 A	Auto	B	44
544	1-phase	230	50	1.4	1.1	2900	6.3 A	42 A	Auto	B	44


PERFORMANCE

Type	Pressure switch setting (kPa)	Suction depth (m)	Total head in metres					Maximum pump pressure (kPa)
			15	21	27	34	40	
			Capacity (litres per minute)					
543	210-350	0	117	105	65	28		390
		3	94	84	52	22		360
		6	67	60	37	16		330
		7.6	47	42	26	11		315
544	280-420	0	82	81	67	42	22	475
		3	66	65	54	34	18	445
		6	47	46	38	24	13	415
		7.6	33	32	27	17	9	400

PUMP CONSTRUCTION MATERIALS


Component	Material
Pump casing	Noryl
End shield	Cast iron
Baffle	Noryl
Priming/drain plug	Acetal
Impeller	Polycarb 20% glass filled
Diffuser	Noryl
Shaft sleeve	Nylon
Motor shaft	Mild steel
O-ring's	Nitrile
Mechanical seal	Carbon / ceramic

PERFORMANCE CURVE

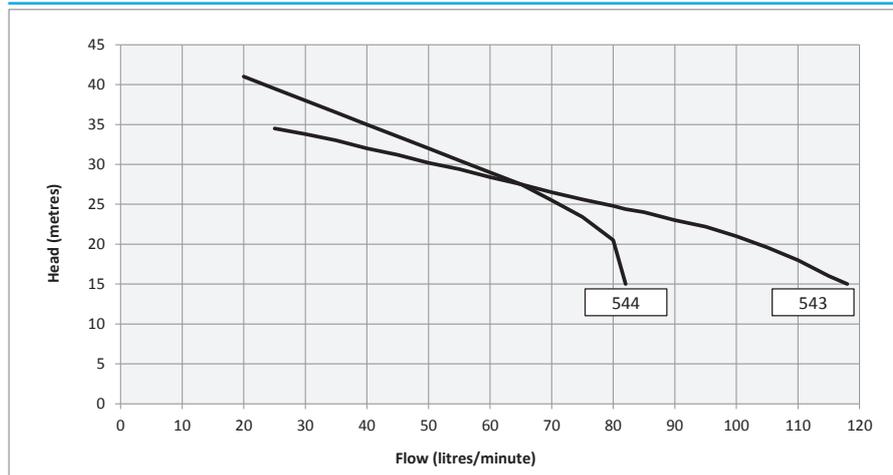

DIMENSIONS

Type	Maximum L x W x H	Weight approx.	Inlet	Pump outlet	Pressure kit outlet	Carton L x W x H	Packed weight
543/544	530 x 230 x 290 mm	25 kg	1 1/4" BSP (male)	3/4" BSP (female)	1" BSP (female)	590 x 300 x 330 mm	27 kg

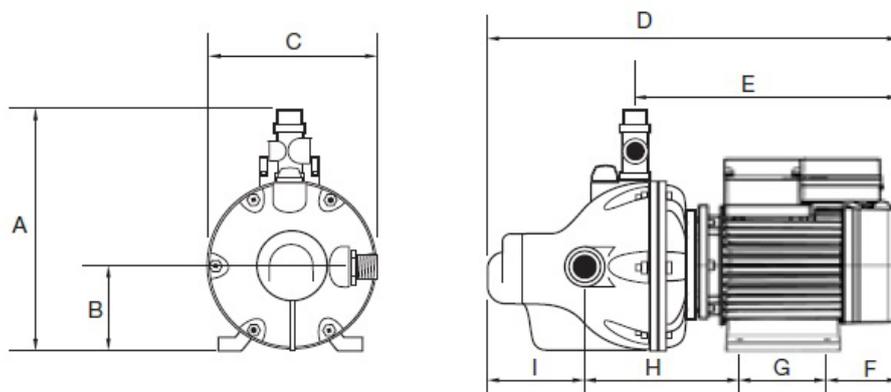

Type	A	B	C	D	E	F	G	H	I
543/544	290	100	230	530	330	110	110	205	115

L100265 0515



Head Office Pentair AU/NZ: 1-21 Monash Drive, Dandenong South, VIC 3175, Australia. www.pentair.com.au

All Pentair trademarks and logos are owned by Pentair, Ltd. All other brand or product names are trademarks or registered marks of their respective owners.

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.

Pentair is an equal opportunity employer.

ABN 27 004 856 204 © 2012 Pentair, Ltd. All Rights Reserved.

© 2015 Pentair