



PENTAIR
SOUTHERN CROSS

PVMI / SBI Vertical MultiStage Pumps

PERFORMANCE DATA





FEATURES	BENEFITS
Vertical multistage design with inline suction/discharge ports	Compact footprint minimizes required floor space, ideal for installations with limited room.
Cartridge-style mechanical seal	Enables quick and easy replacement without dismantling the pump, ensuring consistent sealing and reducing downtime.
Silicon Carbide (SiC) wear face with superior resistance to wear, heat, and chemicals	Extends seal life and lowers maintenance frequency, especially in demanding operating conditions.
High-efficiency hydraulic design	Allows use of smaller motors, resulting in reduced power consumption and lower operating costs.
All wetted components made from AISI 304 stainless steel (AISI 316 optional)	Provides excellent corrosion resistance and enhances product longevity in various water applications.
Wide fluid temperature range (-15°C to 120°C)	Suitable for both cold and hot water systems, increasing versatility.
Flow rates up to 150 m³/h and heads up to 250 meters	Accommodates a broad range of clean water applications, from domestic to industrial use.
Direct-coupled to high-quality WEG W21 motor	Ensures robust performance and long-term reliability.
SXN3000 VFD for all 3-phase PVM(E) models, with smartphone app interface	Simplifies commissioning & operation, offers remote monitoring and control, and provides real-time error notifications—enhancing user experience and reducing service costs.
All wet ends certified and tested to comply with the requirements of the AS/NZS 4020 standard	Hydraulic materials in contact with water do not adversely affect water quality or pose health risks when used in potable water systems




PENTAIR

SOUTHERN CROSS

PVMI / SBI Vertical MultiStage Pumps


SELECTION CHART

PERFORMANCE DATA

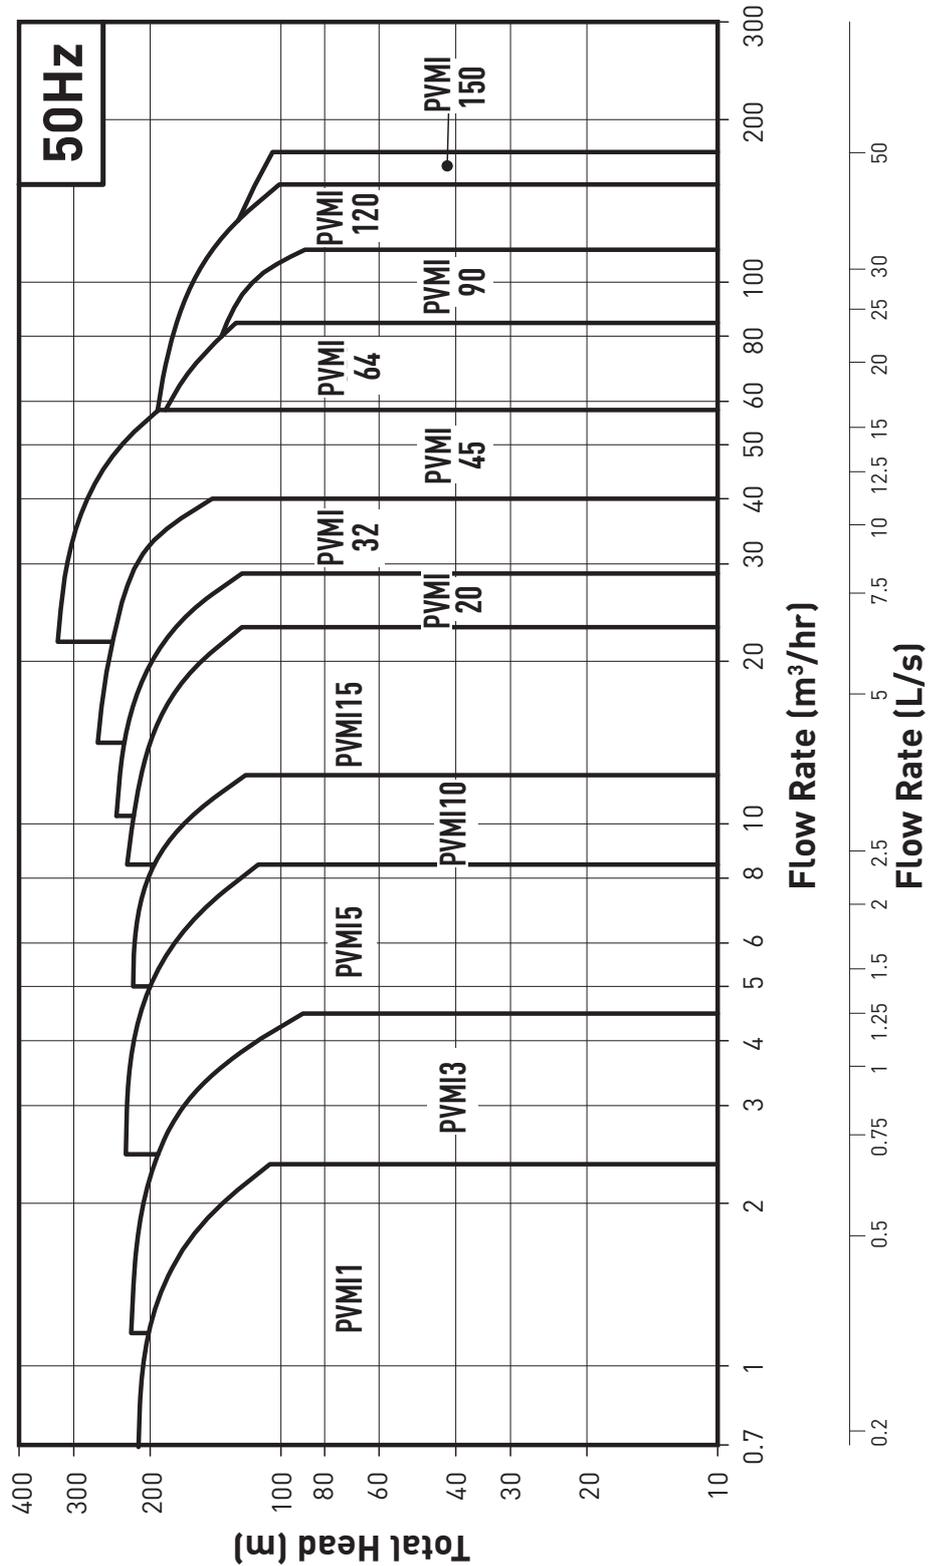

Performance to AS2417 Grade 2 for clean, cold water only.

TECHNICAL DATA

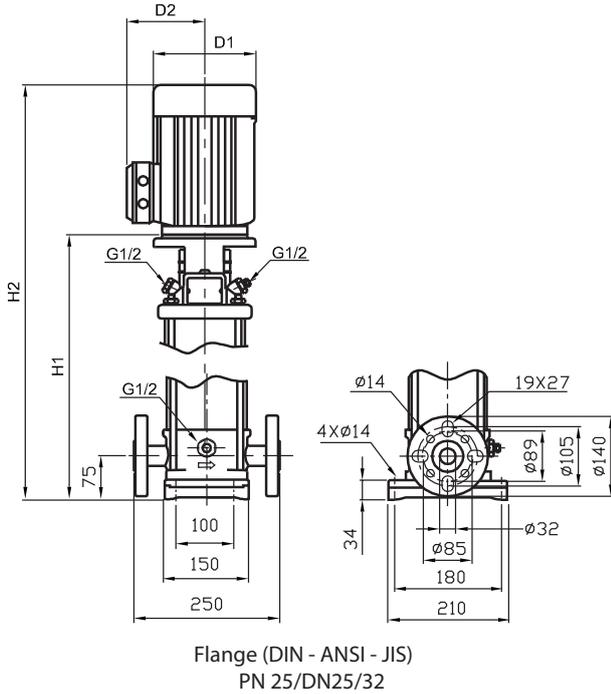


Construction Materials	PVMI	PVMX
Motor Bracket	Ductile Iron	ASTM A530 70-50-05
Top Cap	Stainless Steel	AISI 304 AISI 316
Impeller	Stainless steel	AISI 304 AISI 316
Shaft	Stainless steel	AISI 431 AISI 316
Outer Sleeve	Stainless Steel	AISI 304 AISI 316
Outer Sleeve O Ring		EPDM
Diffuser	Stainless Steel	AISI 304 AISI 316
Neck Ring		PTFE
Base	Stainless Steel	AISI 304 AISI 316
Base plate	Cast Iron	ASTM A48 25B
Coupling	Fe-Cu-C	MPIF FC0525
Mechanical Seal	Cartridge Type	SiC/SiC
Pump Range PVMI/PVMX		
Nominal Flow	1m ³ /h	
Flow Range	0.7 - 2.4m ³ /h	
Maximum Head	22 bar	
Max. Inlet Pressure	10 bar	
Max. Operating Pressure	25 bar	
Fluid Temperature	-15 to +120°C	
Motor		
Single Phase	220-230/240V	
Three Phase	220-240/380-415V	
Insulation	Class F	
Enclosure	IP55	
Ambient Temp	40°C	
Connections		
Flange	DIN(ISO) PN16/25 DN25/32 ANSI Class 300 NB25/32 AS2129 Table D/E NB25/32 (Use M12 Bolts) AS2129 Table F/H NB32/40	

DIMENSIONS AND WEIGHTS (3 PHASE UNITS)						
Pump Type	Motor P2 (kW)	Dimension (mm)				Net Weight (kg)
		H1	H2	D1	D2	
PVMI 1-2	0.37	282	542	160	155	20.0
PVMI 1-3	0.37	282	542	160	155	21.0
PVMI 1-4	0.37	300	560	160	155	21.0
PVMI 1-5	0.37	318	578	160	155	21.0
PVMI 1-6	0.37	336	596	160	155	22.0
PVMI 1-7	0.37	354	614	160	155	22.0
PVMI 1-8	0.55	372	632	160	155	23.0
PVMI 1-9	0.55	390	650	160	155	24.0
PVMI 1-10	0.55	408	668	160	155	24.0
PVMI 1-11	0.55	426	686	160	155	24.0
PVMI 1-12	0.75	450	710	160	155	27.0
PVMI 1-13	0.75	468	728	160	155	28.0
PVMI 1-15	0.75	504	764	160	155	28.0
PVMI 1-17	1.1	540	800	160	155	31.0
PVMI 1-19	1.1	576	836	160	155	32.0
PVMI 1-21	1.1	612	872	160	155	33.0
PVMI 1-23	1.1	648	908	160	155	34.0
PVMI 1-25	1.5	700	1005	175	165	41.0
PVMI 1-27	1.5	736	1041	175	165	41.8
PVMI 1-30	1.5	790	1095	175	165	42.9
PVMI 1-33	2.2	844	1179	175	165	46.0
PVMI 1-36	2.2	898	1233	175	165	47.2

PVMI 1 Motor Data						
Power (kW)	0.37	0.55	0.75	1.1	1.5	2.2
In (A) 1 x 240V	2.50	3.60	4.70	6.50	8.70	12.5
In (A) 3 x 415V	1.20	1.70	2.10	2.83	3.70	5.20


Performance to AS2417 Grade 2 for clean, cold water only.

PERFORMANCE DATA

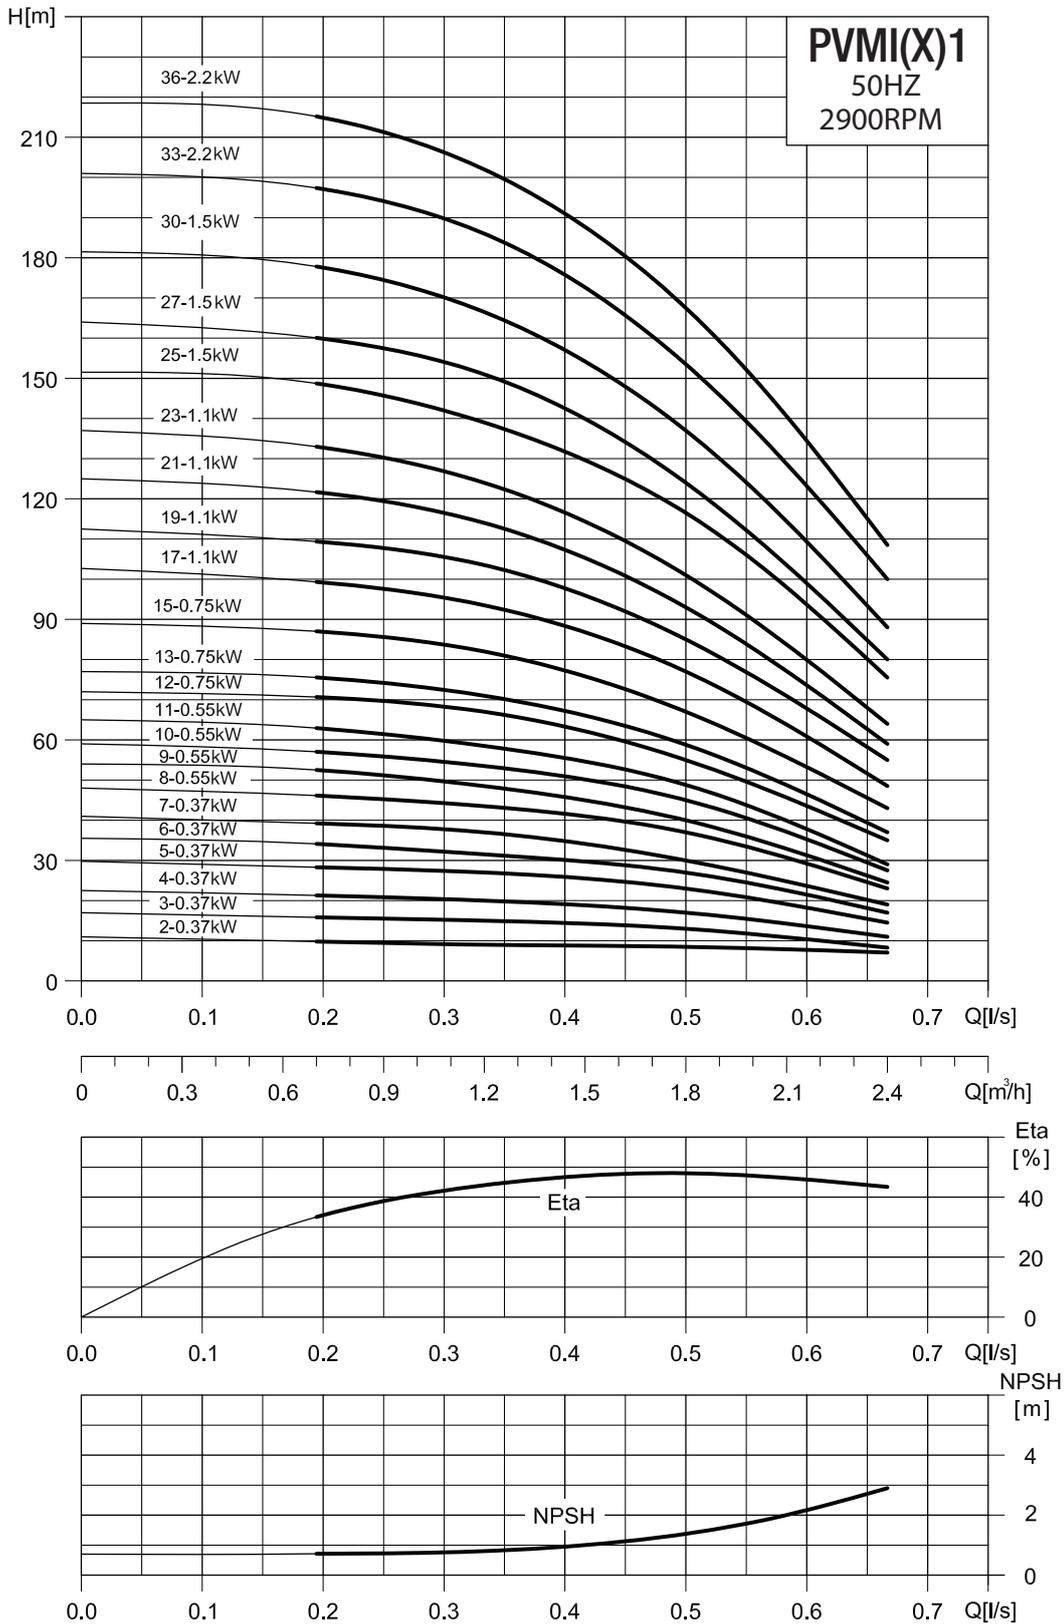

Performance to AS2417 Grade 2 for clean, cold water only.

TECHNICAL DATA

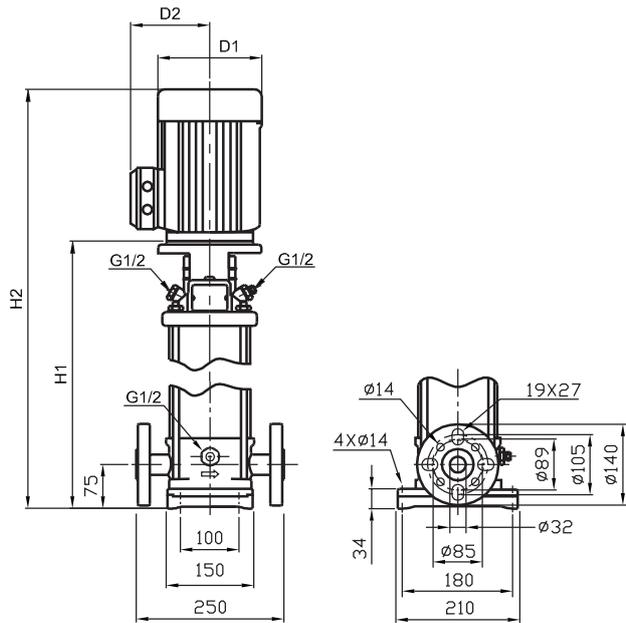

Flange (DIN - ANSI - JIS)
PN 25/DN25/32


Construction Materials	PVMI	PVMX
Motor Bracket	Ductile Iron	ASTM A530 70-50-05
Top Cap	Stainless Steel	AISI 304
Impeller	Stainless steel	AISI 304
Shaft	Stainless steel	AISI 431
Outer Sleeve	Stainless Steel	AISI 304
Outer Sleeve O Ring		EPDM
Diffuser	Stainless Steel	AISI 304
Neck Ring		PTFE
Base	Stainless Steel	AISI 304
Base plate	Cast Iron	ASTM A48 25B
Coupling	Fe-Cu-C	MPIF FC0525
Mechanical Seal	Cartridge Type	SiC/SiC
Pump Range PVMI/PVMX		
Nominal Flow	3m ³ /h	
Flow Range	1.2 - 4.5m ³ /h	
Maximum Head	24 bar	
Max. Inlet Pressure	10 bar (2-29 stages) 15 bar (31-36 stages)	
Max. Operating Pressure	25 bar	
Fluid Temperature	-15 to +120°C	
Motor		
Single Phase	220-230/240V	
Three Phase	220-240/380-415V	
Insulation	Class F	
Enclosure	IP55	
Ambient Temp	40°C	
Connections		
Flange	DIN(ISO) PN16/25 DN25/32 ANSI Class 300 NB25/32 AS2129 Table D/E NB25/32 (Use M12 Bolts) AS2129 Table F/H NB32/40	

DIMENSIONS AND WEIGHTS (3 PHASE UNITS)						
Pump Type	Motor P2(kw)	Dimension (mm)				Net Weight (kg)
		H1	H2	D1	D2	
PVMI 3-2	0.37	282	542	160	155	19.0
PVMI 3-3	0.37	282	542	160	155	19.0
PVMI 3-4	0.37	300	560	160	155	19.0
PVMI 3-5	0.37	318	578	160	155	20.0
PVMI 3-6	0.55	336	596	160	155	21.0
PVMI 3-7	0.55	354	614	160	155	21.0
PVMI 3-8	0.75	378	638	160	155	24.0
PVMI 3-9	0.75	396	655	160	155	24.0
PVMI 3-10	0.75	414	674	160	155	25.0
PVMI 3-11	1.1	432	692	160	155	27.0
PVMI 3-12	1.1	450	710	160	155	28.0
PVMI 3-13	1.1	468	728	160	155	28.0
PVMI 3-15	1.1	504	764	160	155	29.0
PVMI 3-17	1.5	556	861	175	165	38.1
PVMI 3-19	1.5	592	897	175	165	38.8
PVMI 3-21	2.2	628	963	175	165	41.6
PVMI 3-23	2.2	664	999	175	165	42.3
PVMI 3-25	2.2	700	1035	175	165	43.1
PVMI 3-27	2.2	736	1072	175	165	43.8
PVMI 3-29	2.2	772	1107	175	165	44.6
PVMI 3-31	3.0	812	1152	200	170	52.8
PVMI 3-33	3.0	848	1188	200	170	53.5
PVMI 3-36	3.0	902	1242	200	170	54.7

PVMI 3 Motor Data						
Power (kW)	0.37	0.55	0.75	1.1	1.5	2.2
In (A) 1 x 240V	2.50	3.60	4.70	6.50	8.70	12.5
In (A) 3 x 415V	1.20	1.70	2.10	2.83	3.70	5.20





Performance to AS2417 Grade 2 for clean, cold water only.

PERFORMANCE DATA

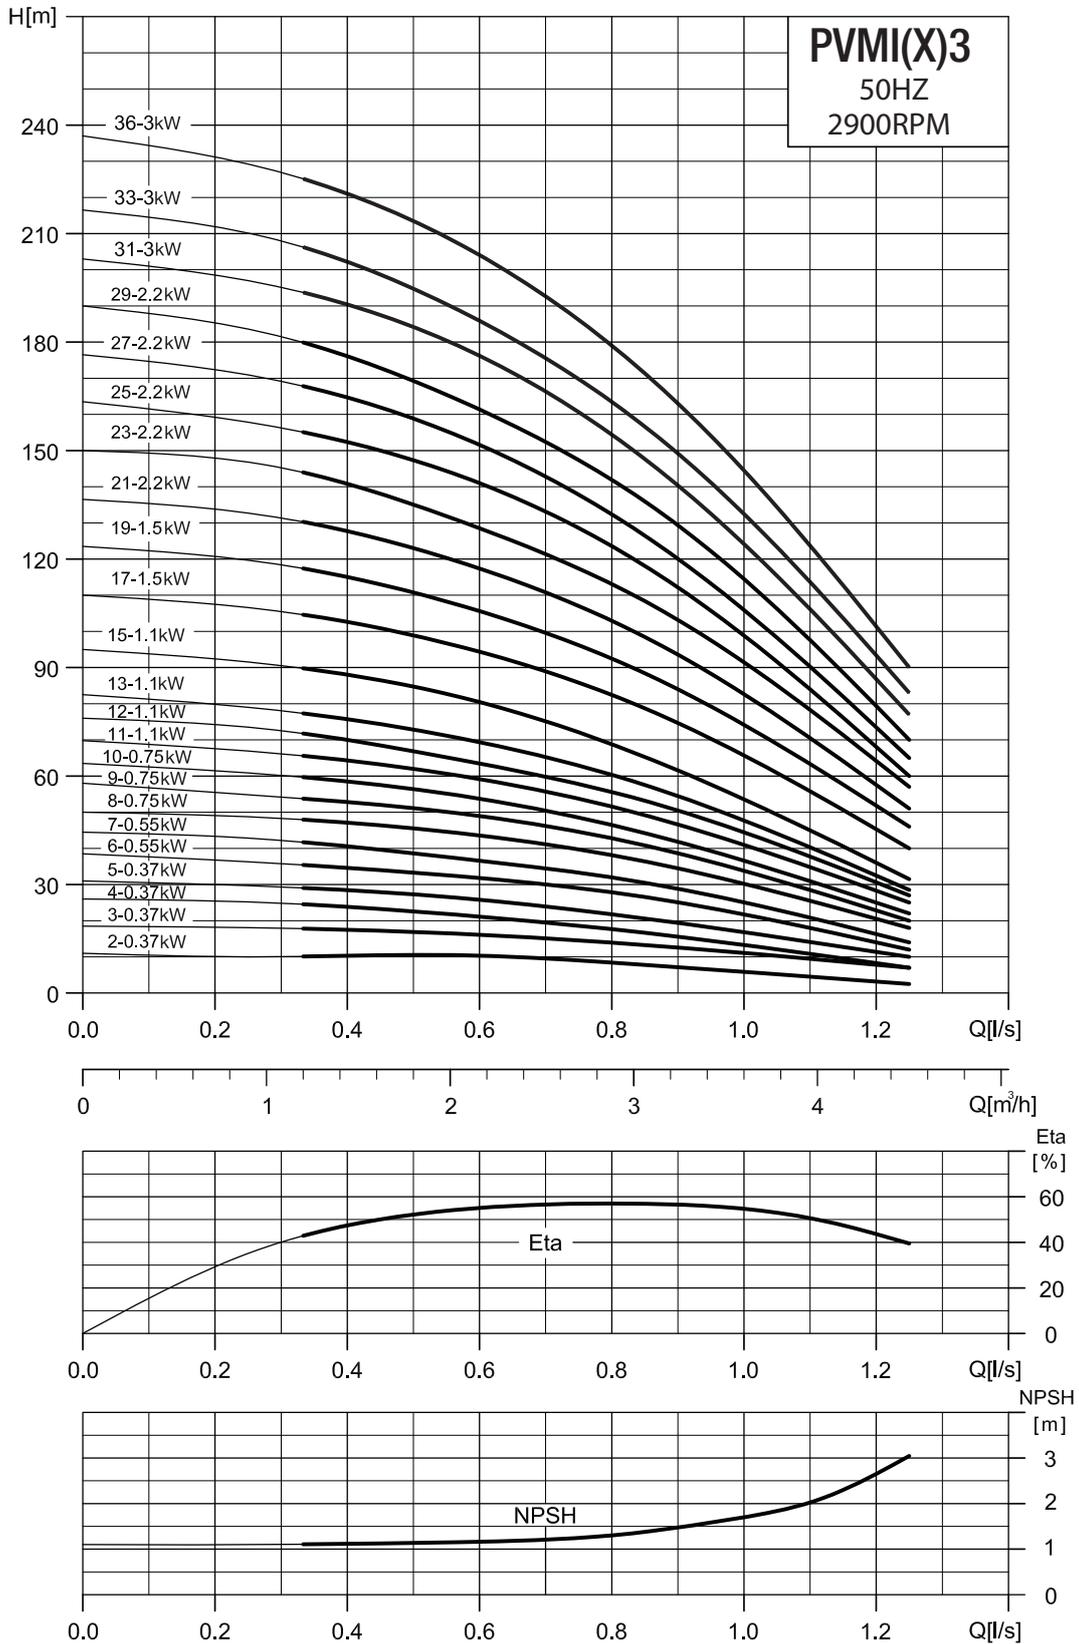


Performance to AS2417 Grade 2 for clean, cold water only.

PERFORMANCE DATA

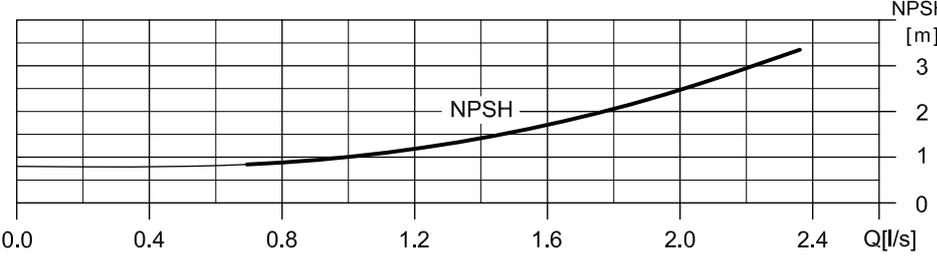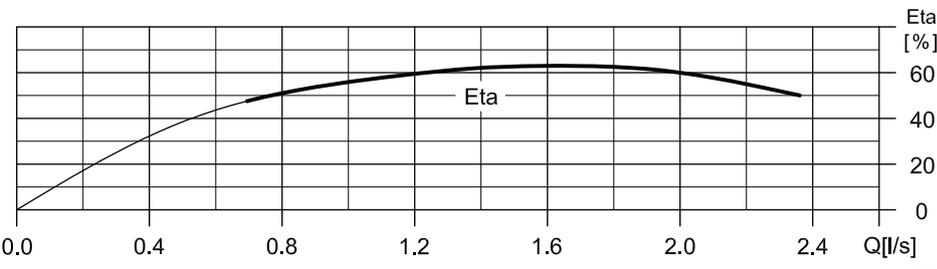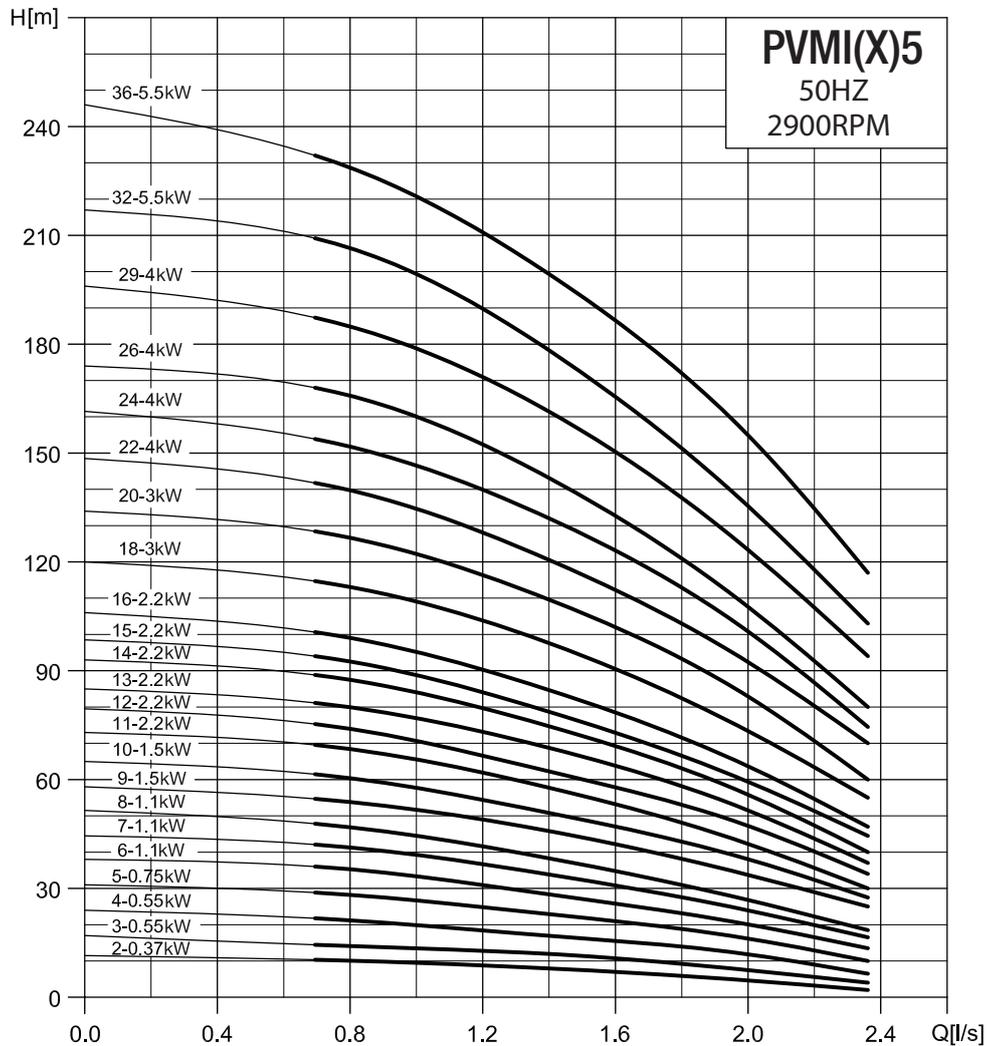

Performance to AS2417 Grade 2 for clean, cold water only.

TECHNICAL DATA

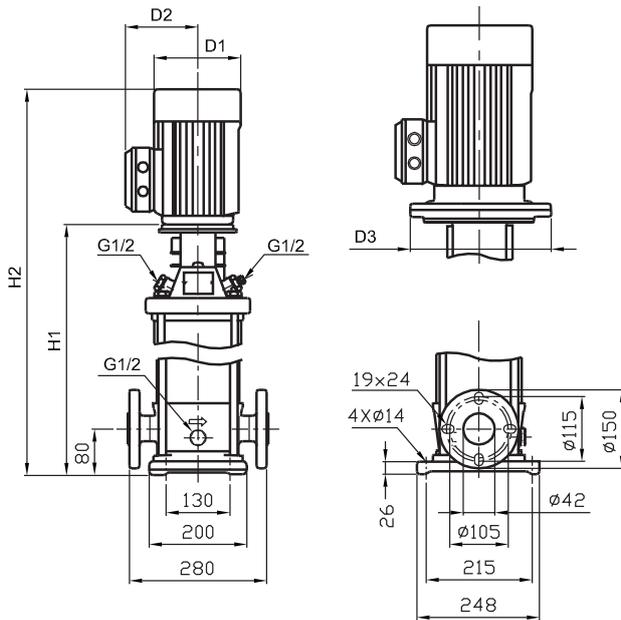

Flange (DIN - ANSI - JIS)
PN 16-25/DN40




Construction Materials		PVMI	PVMX
Motor Bracket	Ductile iron	ASTM A530 70-50-05	
Top Cap	Stainless Steel	AISI 304	AISI 316
Impeller	Stainless steel	AISI 304	AISI 316
Shaft	Stainless steel	AISI 431	AISI 316
Outer Sleeve	Stainless Steel	AISI 304	AISI 316
Outer Sleeve O Ring		EPDM	
Diffuser	Stainless Steel	AISI 304	AISI 316
Neck Ring		PTFE	
Base	Stainless Steel	AISI 304	AISI 316
Base plate	Cast Iron	ASTM A48 25B	
Coupling	Fe-Cu-C	MPIF FC0525	
Mechanical Seal	Cartridge Type	SiC/SiC	
Pump Range PVMI/PVMX			
Nominal Flow	10m ³ /h		
Flow Range	5 - 13m ³ /h		
Maximum Head	22 bar		
Max. Inlet Pressure	8 bar (1-6 stages) 10 bar (7-22 stages)		
Max. Operating Pressure	16 bar (1-16 stages) 25 bar (18-22 stages)		
Fluid Temperature	-15 to +120°C		
Motor			
Single Phase	220-230/240V		
Three Phase	220-240/380-415V		
Insulation	Class F		
Enclosure	IP55		
Ambient Temp	40°C		
Connections			
Flange	DIN(ISO) PN16/25 DN40		
	ANSI Class 300 NB40		
	AS2129 Table D/E NB50		
	AS2129 Table F/H NB40		

DIMENSIONS AND WEIGHTS (3 PHASE UNITS)							
Pump Type	Motor P2(kW)	Dimension (mm)					Net Weight (kg)
		H1	H2	D1	D2	D3	
PVMI 10-1	0.37	353	613	160	155	—	32.0
PVMI 10-2	0.75	357	617	160	155	—	34.0
PVMI 10-3	1.1	387	647	160	155	—	38.0
PVMI 10-4	1.5	433	738	175	165	—	47.1
PVMI 10-5	2.2	463	798	175	165	—	50.1
PVMI 10-6	2.2	493	828	175	165	—	51.1
PVMI 10-7	3.0	528	868	200	170	—	58.9
PVMI 10-8	3.0	558	898	200	170	—	60.0
PVMI 10-9	3.0	588	928	200	170	—	61.0
PVMI 10-10	4.0	618	1023	220	188	—	69.0
PVMI 10-12	4.0	678	1083	220	188	—	71.0
PVMI 10-14	5.5	770	1200	275	213	300	96.4
PVMI 10-16	5.5	830	1260	275	213	300	98.5
PVMI 10-18	7.5	890	1320	275	213	300	108.5
PVMI 10-20	7.5	950	1380	275	213	300	110.5
PVMI 10-22	7.5	1010	1440	275	213	300	112.6

PVMI 10 Motor Data										
Power (kW)	0.37	0.75	1.1	1.5	2.2	3.0	4.0	5.5	7.5	
In (A) 1 x 240V	2.50	4.70	6.50	8.70	12.5	16.7	—	—	—	
In (A) 3 x 415V	1.20	2.10	2.83	3.70	5.20	6.10	7.7	9.9	14.9	


Performance to AS2417 Grade 2 for clean, cold water only.

PERFORMANCE DATA

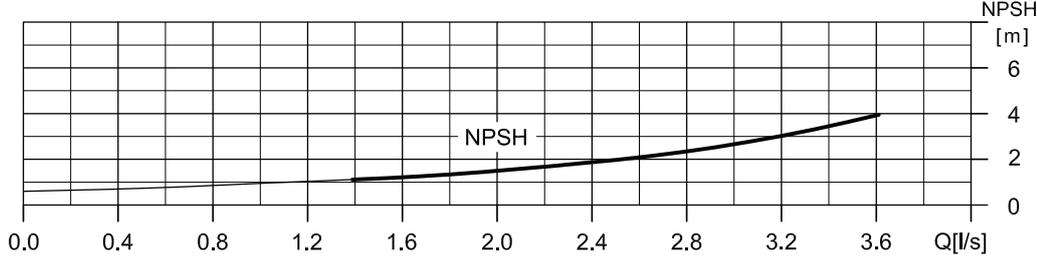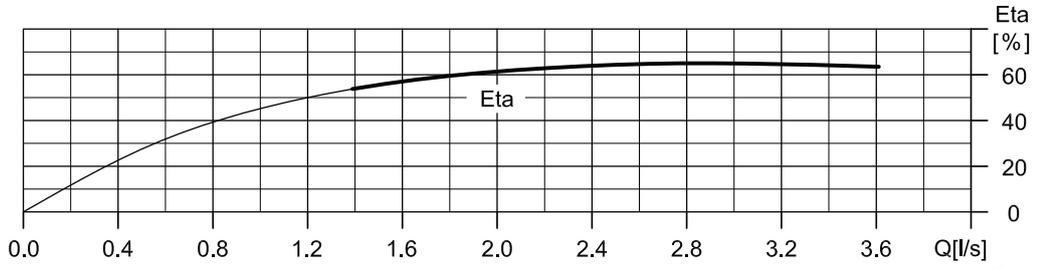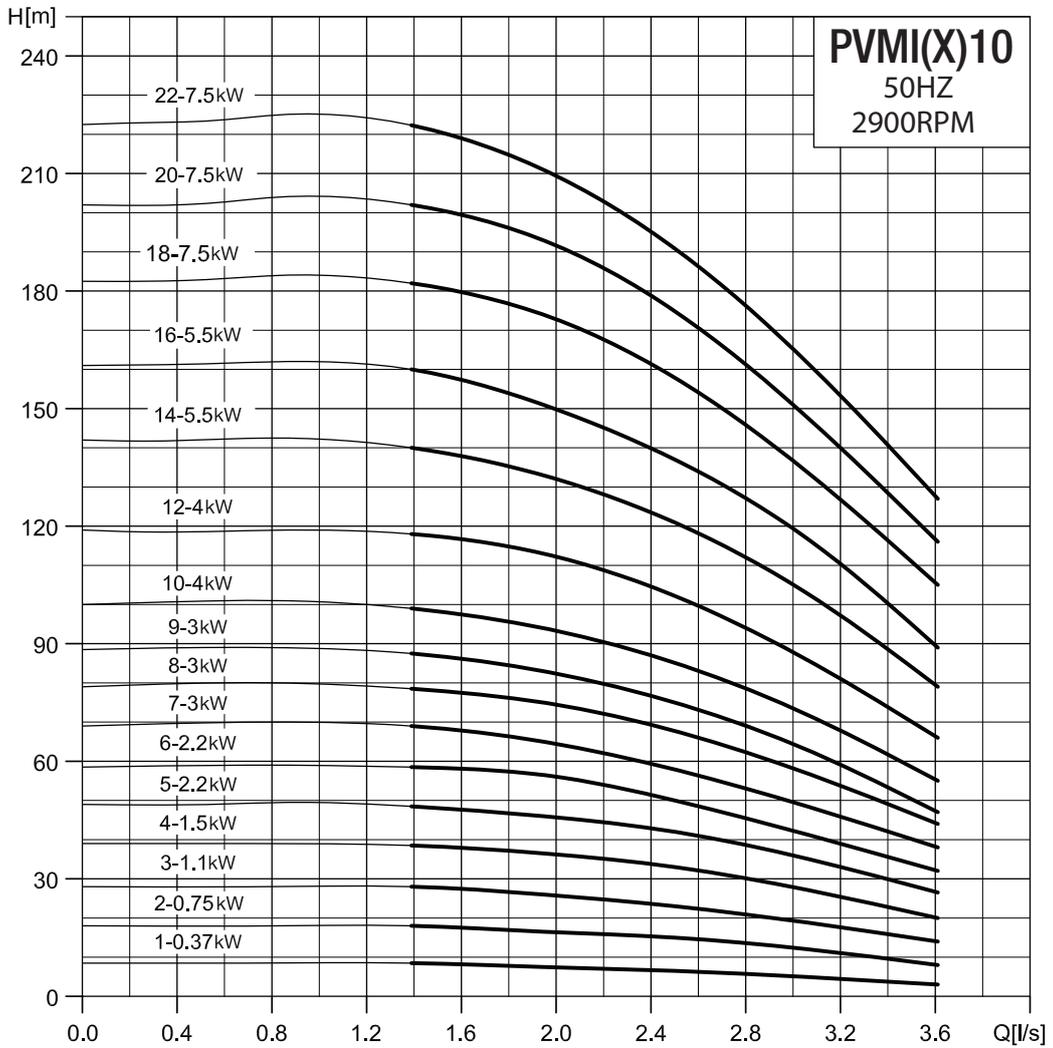

Performance to AS2417 Grade 2 for clean, cold water only.

TECHNICAL DATA

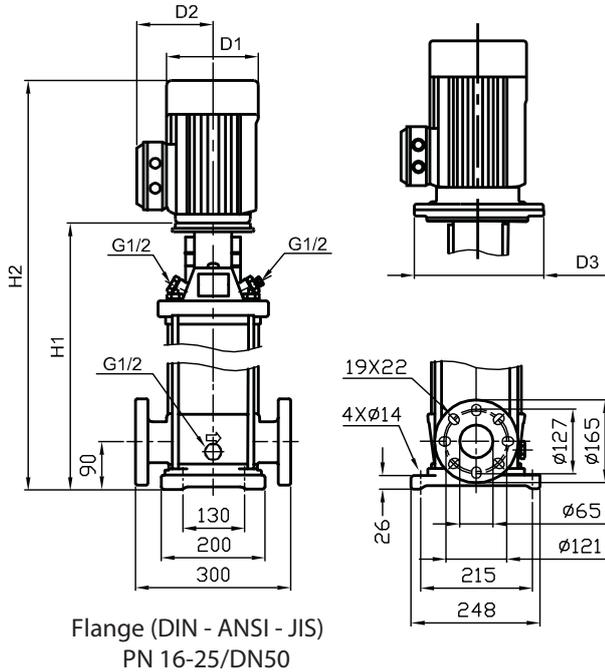





Construction Materials		PVMI	PVMX
Motor Bracket	Ductile Iron	ASTM A530 70-50-05	
Top Cap	Stainless Steel	AISI 304	AISI 316
Impeller	Stainless steel	AISI 304	AISI 316
Shaft	Stainless steel	AISI 431	AISI 316
Outer Sleeve	Stainless Steel	AISI 304	AISI 316
Outer Sleeve O Ring		EPDM	
Diffuser	Stainless Steel	AISI 304	AISI 316
Neck Ring		PTFE	
Base	Stainless Steel	AISI 304	AISI 316
Base plate	Cast Iron	ASTM A48 25B	
Coupling	Fe-Cu-C	MPIF FC0525	
Mechanical Seal	Cartridge Type	SiC/SiC	
Pump Range PVMI/PVMX			
Nominal Flow	15m ³ /h		
Flow Range	9 - 24m ³ /h		
Maximum Head	23 bar		
Max. Inlet Pressure	8 bar (1-3 stages) 10 bar (4-17 stages)		
Max. Operating Pressure	16 bar (1-10 stages) 25bar (12-17 stages)		
Fluid Temperature	-15 to +120°C		
Motor			
Single Phase	220-230/240V		
Three Phase	220-240/380-415V		
Insulation	Class F		
Enclosure	IP55		
Ambient Temp	40°C		
Connections			
Flange	DIN(ISO) PN16/25 DN50 ANSI Class 300 NB50 AS2129 Table D/E NB65 AS2129 Table F/H NB50		

Pump Type	Motor P2(kW)	DIMENSIONS AND WEIGHTS (3 PHASE UNITS)					Net Weight (kg)
		Dimension (mm)					
		H1	H2	D1	D2	D3	
PVMI 15-1	1.1	397	657	160	155	—	42.0
PVMI 15-2	2.2	413	748	175	165	—	48.8
PVMI 15-3	3.0	463	803	200	170	—	57.0
PVMI 15-4	4.0	508	913	220	188	—	65.4
PVMI 15-5	4.0	553	958	220	188	—	66.8
PVMI 15-6	5.5	630	1060	275	213	300	91.6
PVMI 15-7	5.5	675	1105	275	213	300	93.0
PVMI 15-8	7.5	720	1150	275	213	300	102.4
PVMI 15-9	7.5	765	1205	275	213	300	103.8
PVMI 15-10	11.0	887	1392	314	260	350	180.9
PVMI 15-12	11.0	977	1482	314	260	350	183.7
PVMI 15-14	11.0	1067	1572	314	260	350	186.5
PVMI 15-17	15.0	1202	1707	314	260	350	190.7

PVMI 15 Motor Data										
Power (kW)	1.1	1.5	2.2	3.0	4.0	5.5	7.5	11.0	15.0	
In (A) 1 x 240V	6.50	8.70	12.5	16.7	—	—	—	—	—	
In (A) 3 x 415V	2.83	3.70	5.20	6.10	7.7	9.9	14.9	21.2	29.2	


Performance to AS2417 Grade 2 for clean, cold water only.

PERFORMANCE DATA

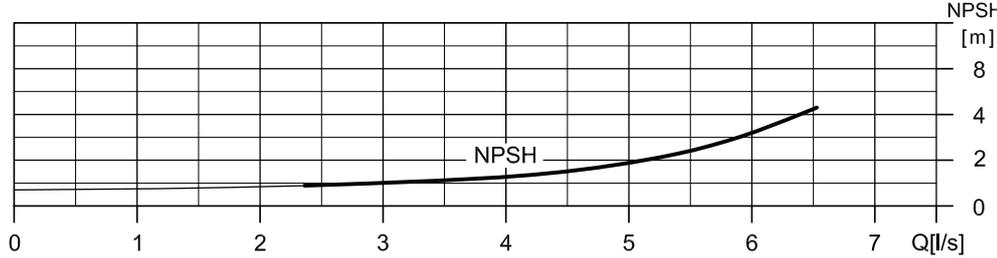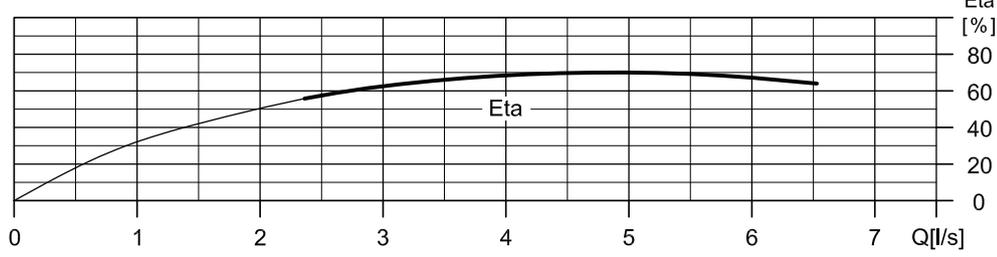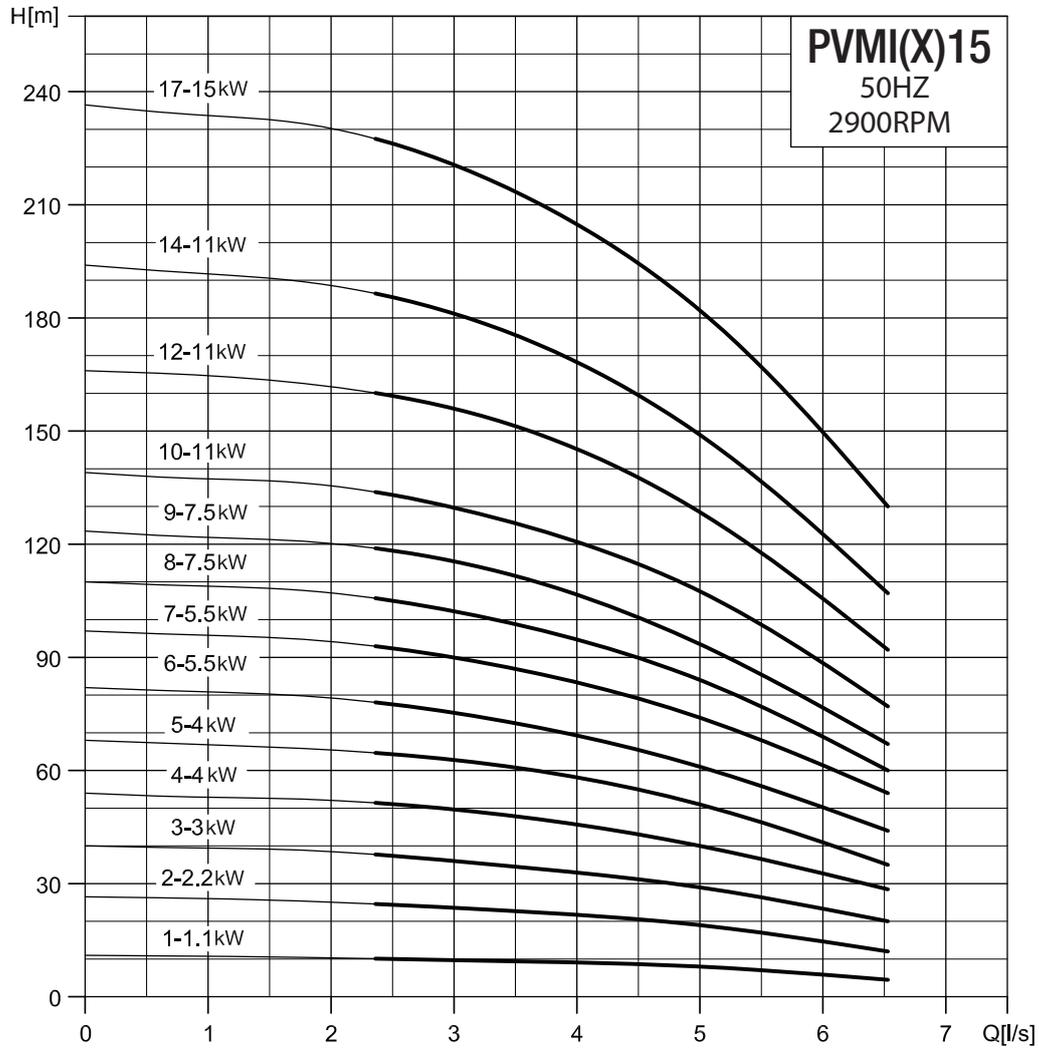

Performance to AS2417 Grade 2 for clean, cold water only.

TECHNICAL DATA

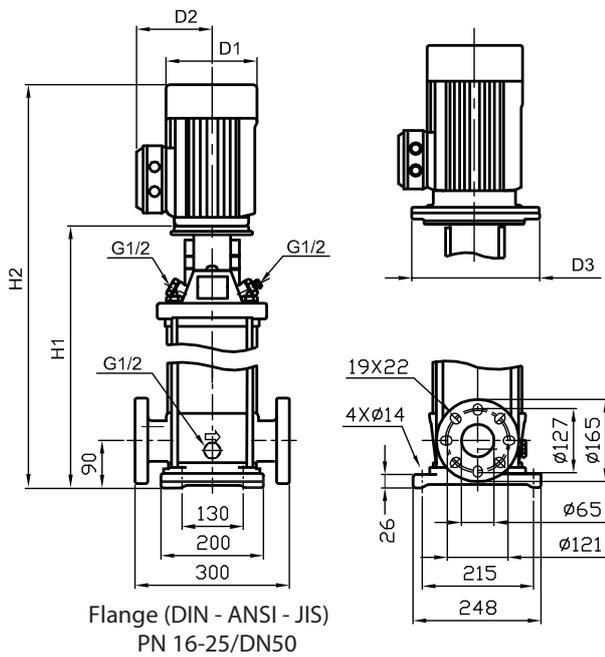


Construction Materials		PVMI	PVMX
Motor Bracket	Ductile Iron	ASTM A530 70-50-05	
Top Cap	Stainless Steel	AISI 304	AISI 316
Impeller	Stainless steel	AISI 304	AISI 316
Shaft	Stainless steel	AISI 431	AISI 316
Outer Sleeve	Stainless Steel	AISI 304	AISI 316
Outer Sleeve O Ring		EPDM	
Diffuser	Stainless Steel	AISI 304	AISI 316
Neck Ring		PTFE	
Base	Stainless Steel	AISI 304	AISI 316
Base plate	Cast Iron	ASTM A48 25B	
Coupling	Fe-Cu-C	MPIF FC0525	
Mechanical Seal	Cartridge Type	SiC/SiC	
Pump Range PVMI/PVMX			
Nominal Flow	20m ³ /h		
Flow Range	11 - 29m ³ /h		
Maximum Head	25 bar		
Max. Inlet Pressure	8 bar (1-3 stages) 10 bar (4-17 stages)		
Max. Operating Pressure	16 bar (1-10 stages) 25 bar (12-17 stages)		
Fluid Temperature	-15 to +120°C		
Motor			
Single Phase	220-230/240V		
Three Phase	220-240/380-415V		
Insulation	Class F		
Enclosure	IP55		
Ambient Temp	40°C		
Connections			
Flange	DIN(ISO) PN16/25 DN50 ANSI Class 300 NB50 AS2129 Table D/E NB65 AS2129 Table F/H NB50		

DIMENSIONS AND WEIGHTS (3 PHASE UNITS)							
Pump Type	Motor P2(kW)	Dimension (mm)					Net Weight (kg)
		H1	H2	D1	D2	D3	
PVMI 20-1	1.1	397	657	160	155	—	39.0
PVMI 20-2	2.2	413	748	175	165	—	48.8
PVMI 20-3	4.0	463	868	220	188	—	64.0
PVMI 20-4	5.5	540	970	275	213	300	88.8
PVMI 20-5	5.5	585	1015	275	213	300	90.2
PVMI 20-6	7.5	630	1060	275	213	300	99.6
PVMI 20-7	7.5	675	1105	275	213	300	101.0
PVMI 20-8	11.0	797	1305	314	260	350	178.1
PVMI 20-10	11.0	887	1392	314	260	350	180.9
PVMI 20-12	15.0	977	1482	314	260	350	183.7
PVMI 20-14	15.0	1067	1572	314	260	350	186.5
PVMI 20-17	18.5	1202	1707	314	260	350	212.7


PVMI 20 Motor Data									
Power (kW)	1.1	2.2	4.0	5.5	7.5	11.0	15.0	18.5	
In (A) 1 x 240V	6.50	12.5	—	—	—	—	—	—	
In (A) 3 x 415V	2.83	5.20	7.7	9.9	14.9	21.2	29.2	34.4	

PERFORMANCE DATA

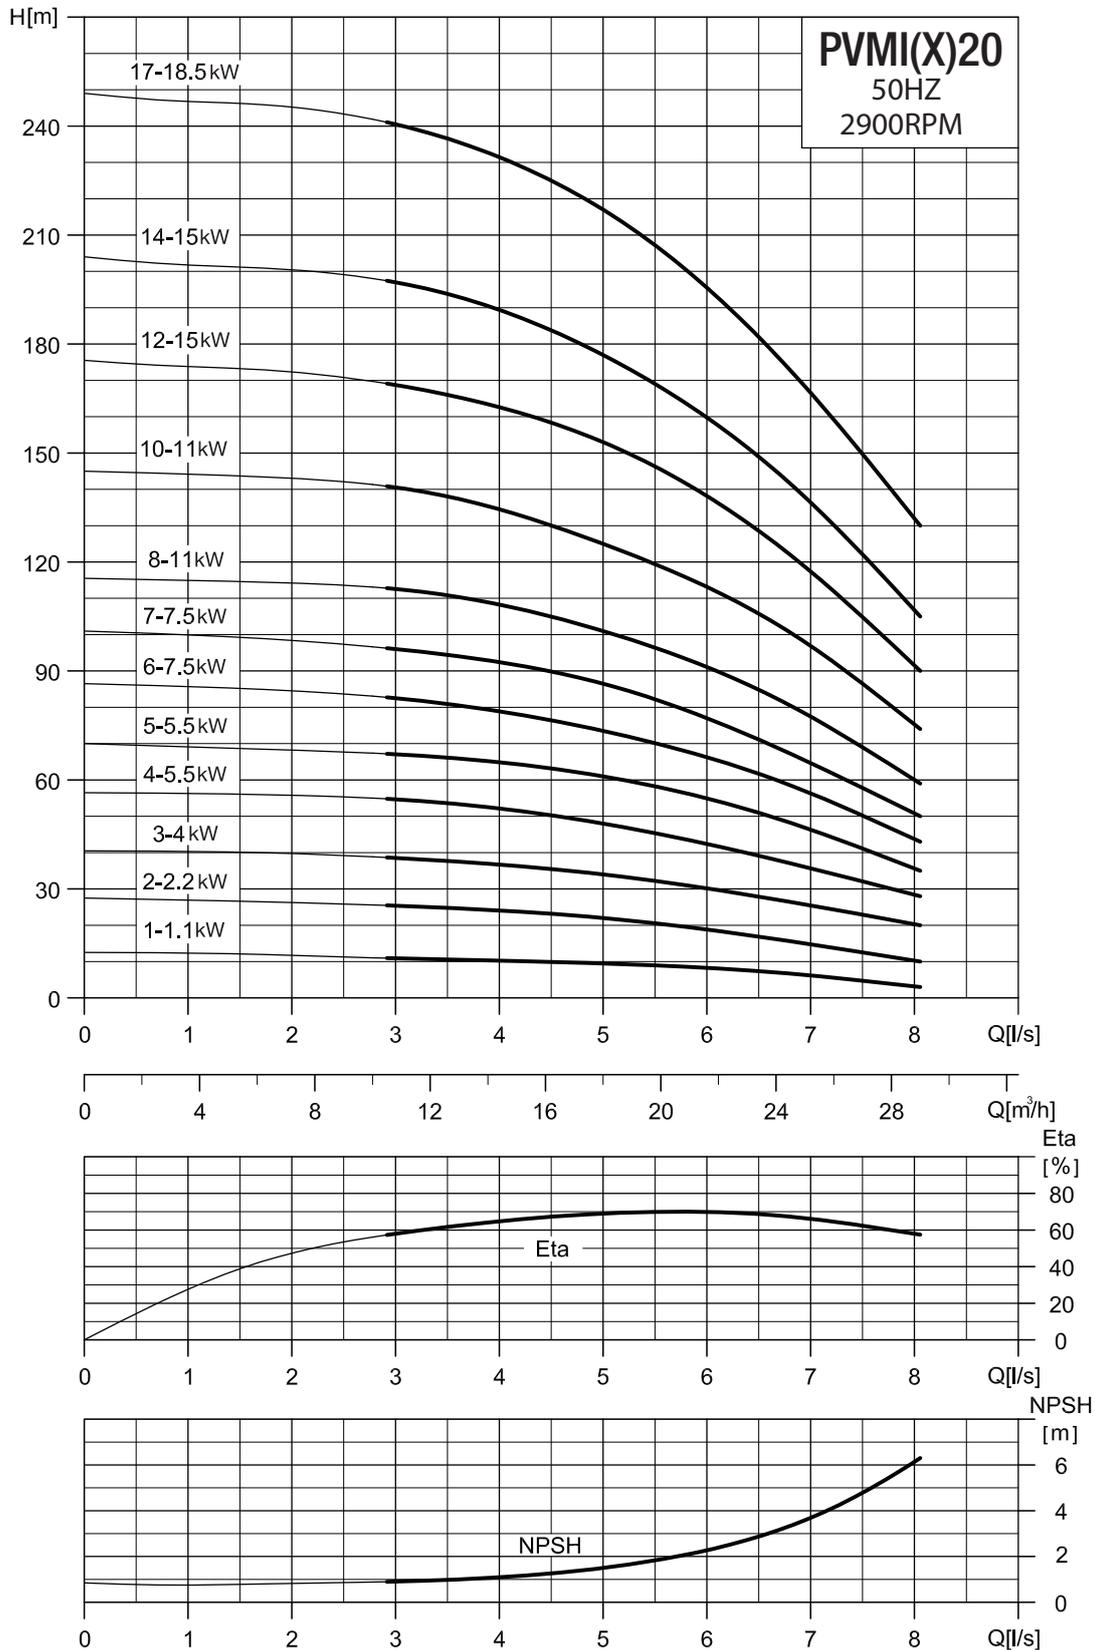

Performance to AS2417 Grade 2 for clean, cold water only.

TECHNICAL DATA

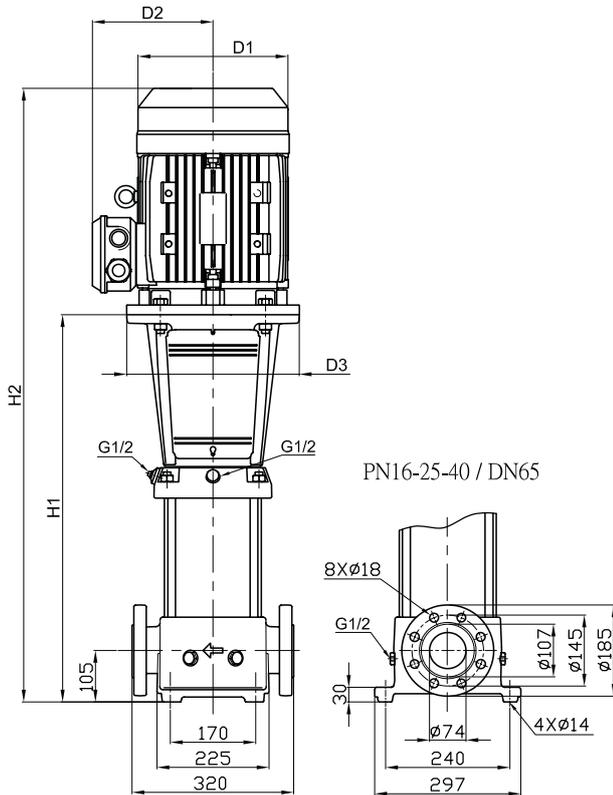




Construction Materials		PVMI	PVMX
Motor Bracket	Grey Cast Iron	ASTM 48-35B	
Top Cap	Stainless Steel	AISI 304	AISI 316
Impeller	Stainless steel	AISI 304	AISI 316
Shaft	Stainless steel	AISI 431	AISI 316
Outer Sleeve	Stainless Steel	AISI 304	AISI 316
Outer Sleeve O Ring		EPDM	
Diffuser	Stainless Steel	AISI 304	AISI 316
Neck Ring		Carbon + POB + PTFE	
Base	Stainless Steel	AISI 304	AISI 316
Base plate	Cast Iron	ASTM A48 25B	
Coupling	Ductile Iron	ASTM A530 70-50-05	
Mechanical Seal	Cartridge Type	SiC/SiC	
Pump Range PVMI/PVMX			
Nominal Flow	32m ³ /h		
Flow Range	15 - 40m ³ /h		
Maximum Head	27.5 bar		
Max. Inlet Pressure	4 bar (1-4 stages) 10 bar (5-10 stages) 15 bar (11-14 stages)		
Max. Operating Pressure	16 bar (1-7 stages) 30 bar (8-14 stages)		
Fluid Temperature	-15 to +120°C		
Motor			
Single Phase	220-230/240V		
Three Phase	220-240/380-415V		
Insulation	Class F		
Enclosure	IP55		
Ambient Temp	40°C		
Connections			
Flange	DIN(ISO) PN16/25/40 DN65 ANSI Class 300 NB65		

DIMENSIONS AND WEIGHTS (3 PHASE UNITS)							
Pump Type	Motor P2(kW)	Dimension (mm)					Net Weight (kg)
		H1	H2	D1	D2	D3	
PVMI 32-1-1	1.5	505	860	175	160	135	70
PVMI 32-1	2.2	505	890	175	160	135	79
PVMI 32-2-2	3.0	575	1005	197	180	143	89
PVMI 32-2	4.0	575	1040	220	190	158	98
PVMI 32-3-2 / PVMI 32-3	5.5	645	1155	262	210	298	107
PVMI 32-4-2 / PVMI 32-4	7.5	715	1225	262	210	298	115
PVMI 32-5-2 / PVMI 32-5	11.0	895	1510	314	255	350	156
PVMI 32-6-2 / PVMI 32-6	11.0	965	1580	314	255	350	160
PVMI 32-7-2 / PVMI 32-7	15.0	1035	1650	314	255	350	197
PVMI 32-8-2 / PVMI 32-8	15.0	1105	1720	314	255	350	201
PVMI 32-9-2 / PVMI 32-9	18.5	1175	1845	314	255	350	215
PVMI 32-10-2 / PVMI 32-10	18.5	1245	1915	314	255	350	219
PVMI 32-11-2 / PVMI 32-11	22	1315	2015	348	280	350	276
PVMI 32-12-2 / PVMI 32-12	22	1385	2085	348	280	350	280
PVMI 32-13-2 / PVMI 32-13	30	1455	2225	386	305	400	362
PVMI 32-14-2 / PVMI 32-14	30	1525	2295	386	305	400	366

PVMI 32 Motor Data												
Power (kW)	1.5	2.2	3.0	4.0	5.5	7.5	11.0	15.0	18.5	22	30	
In (A) 1 x 240V	8.7	12.5	16.7	—	—	—	—	—	—	—	—	—
In (A) 3 x 415V	2.92	4.2	5.53	7.22	9.8	13.2	19.0	25.6	31.5	36.9	49.9	


Performance to AS2417 Grade 2 for clean, cold water only.

PERFORMANCE DATA

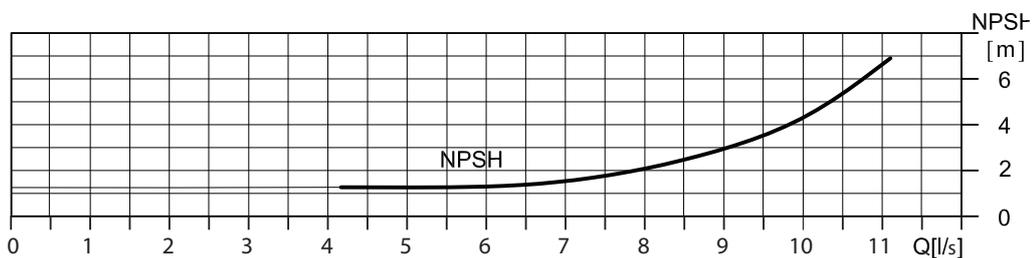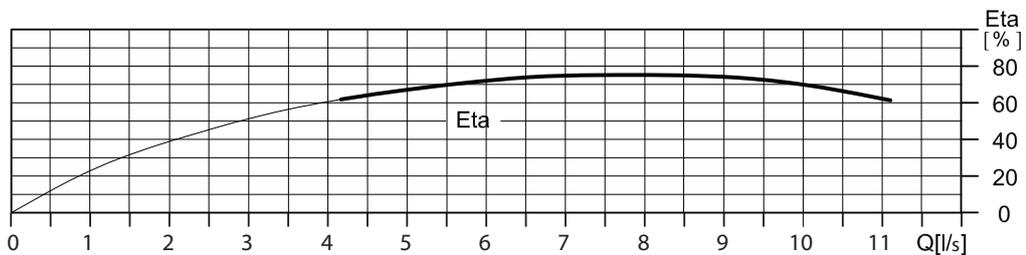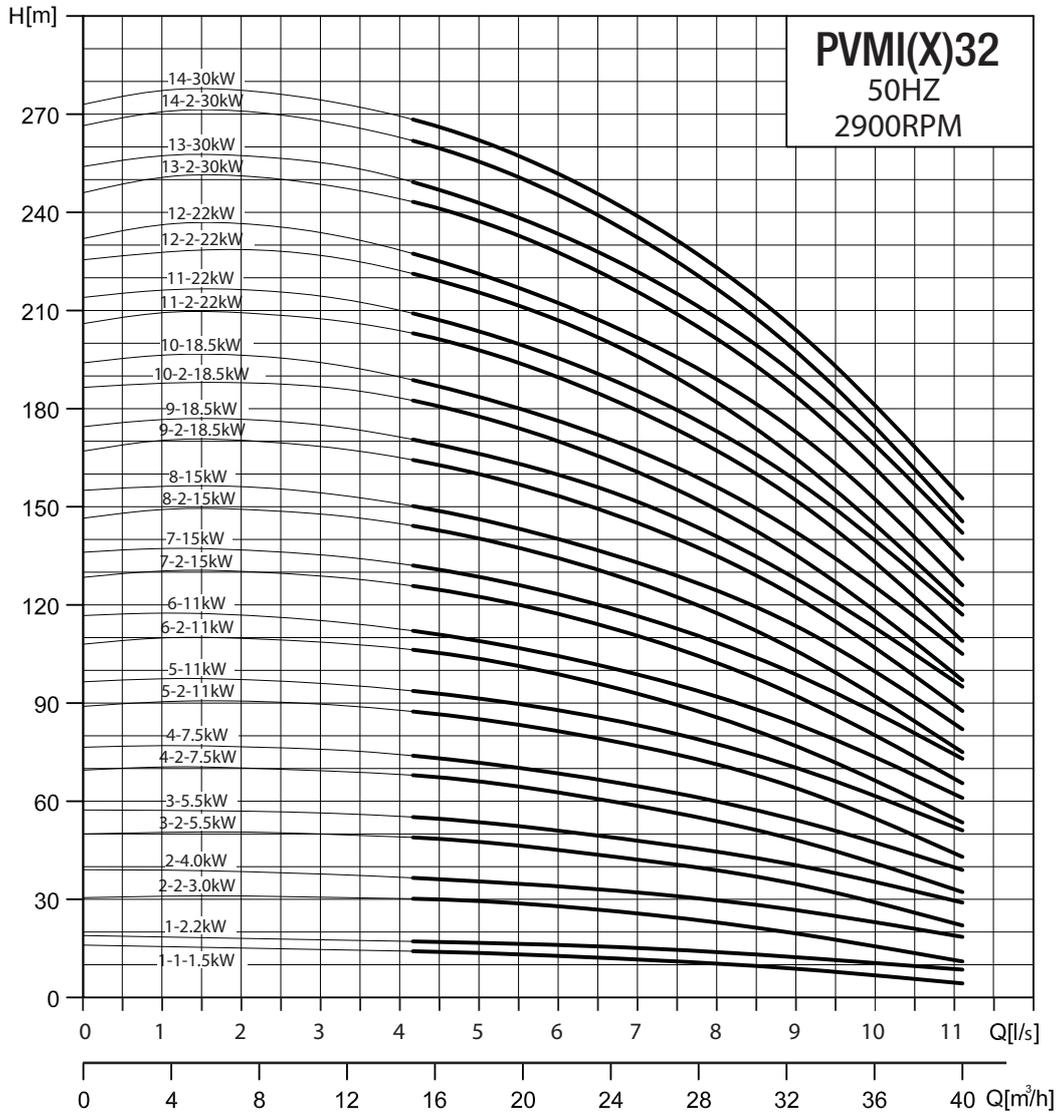

Performance to AS2417 Grade 2 for clean, cold water only.

TECHNICAL DATA

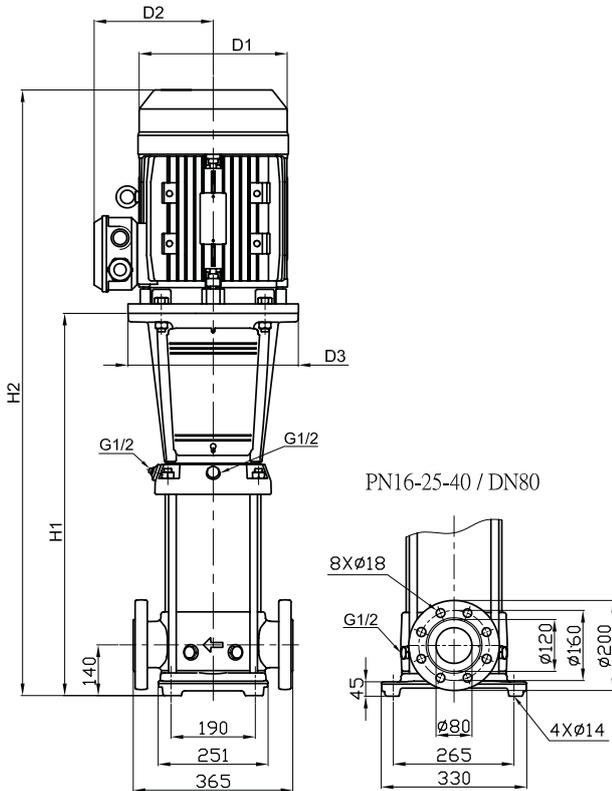


Construction Materials		PVMI	PVMX
Motor Bracket	Grey Cast Iron	ASTM 48-35B	
Top Cap	Stainless Steel	AISI 304	AISI 316
Impeller	Stainless steel	AISI 304	AISI 316
Shaft	Stainless steel	AISI 431	AISI 316
Outer Sleeve	Stainless Steel	AISI 304	AISI 316
Outer Sleeve O Ring		EPDM	
Diffuser	Stainless Steel	AISI 304	AISI 316
Neck Ring		Carbon + POB + PTFE	
Base	Stainless Steel	AISI 304	AISI 316
Base plate	Cast Iron	ASTM A48 25B	
Coupling	Ductile Iron	ASTM A530 70-50-05	
Mechanical Seal	Cartridge Type	SiC/SiC	
Pump Range PVMI/PVMX			
Nominal Flow	45m ³ /h		
Flow Range	22 - 58m ³ /h		
Maximum Head	26 bar		
Max. Inlet Pressure	4 bar (1-2 stages) 10 bar (3-5 stages) 15 bar (6-13 stages)		
Max. Operating Pressure	16 bar (1-5 stages) 30 bar (6-11stages) 33 bar (12-13 stages)		
Fluid Temperature	-15 to +120°C		
Motor			
Single Phase	220-230/240V		
Three Phase	220-240/380-415V		
Insulation	Class F		
Enclosure	IP55		
Ambient Temp	40°C		
Connections			
Flange	DIN(ISO) PN16/25/40 DN80 ANSI Class 300 NB80		

DIMENSIONS AND WEIGHTS (3 PHASE UNITS)							
Pump Type	Motor P2(kW)	Dimension (mm)					Net Weight (kg)
		H1	H2	D1	D2	D3	
PVMI 45-1-1	3.0	559	989	197	180	280	79.3
PVMI 45-1	4.0	559	1024	220	190	280	86.3
PVMI 45-2-2	5.5	639	1149	262	210	300	103.8
PVMI 45-2	7.5	639	1149	262	210	300	112.8
PVMI 45-3-2 / PVMI 45-3	11.0	829	1494	314	255	350	150.1
PVMI 45-4-2 / PVMI 45-4	15.0	909	1524	314	255	350	164.7
PVMI 45-5-2 / PVMI 45-5	18.5	989	1659	314	255	350	203.4
PVMI 45-6-2 / PVMI 45-6	22.0	1069	1769	348	280	350	217.8
PVMI 45-7-2 / PVMI 45-7	30.0	1149	1919	386	305	400	306.7
PVMI 45-8-2 / PVMI 45-8	30.0	1229	1999	386	305	400	310.4
PVMI 45-9-2	30.0	1309	2079	386	305	400	383.1
PVMI 45-9	37.0	1309	2079	386	305	400	383.1
PVMI 45-10-2 / PVMI 45-10	37.0	1389	2159	386	305	400	386.7
PVMI 45-11-2 / PVMI 45-11	45.0	1469	2289	432	335	450	418.3
PVMI 45-12-2 / PVMI 45-12	45.0	1549	2369	432	335	450	421.9
PVMI 45-13-2	45.0	1629	2449	432	335	450	425.5

PVMI 45 Motor Data												
Power (kW)	3.0	4.0	5.5	7.5	11.0	15.0	18.5	22	30	37	45	
In (A) 1 x 240V	16.7	—	—	—	—	—	—	—	—	—	—	
In (A) 3 x 415V	5.53	7.22	9.8	13.2	19.0	25.6	31.5	36.9	49.9	61.3	74.2	

Performance to AS2417 Grade 2 for clean, cold water only.


PERFORMANCE DATA

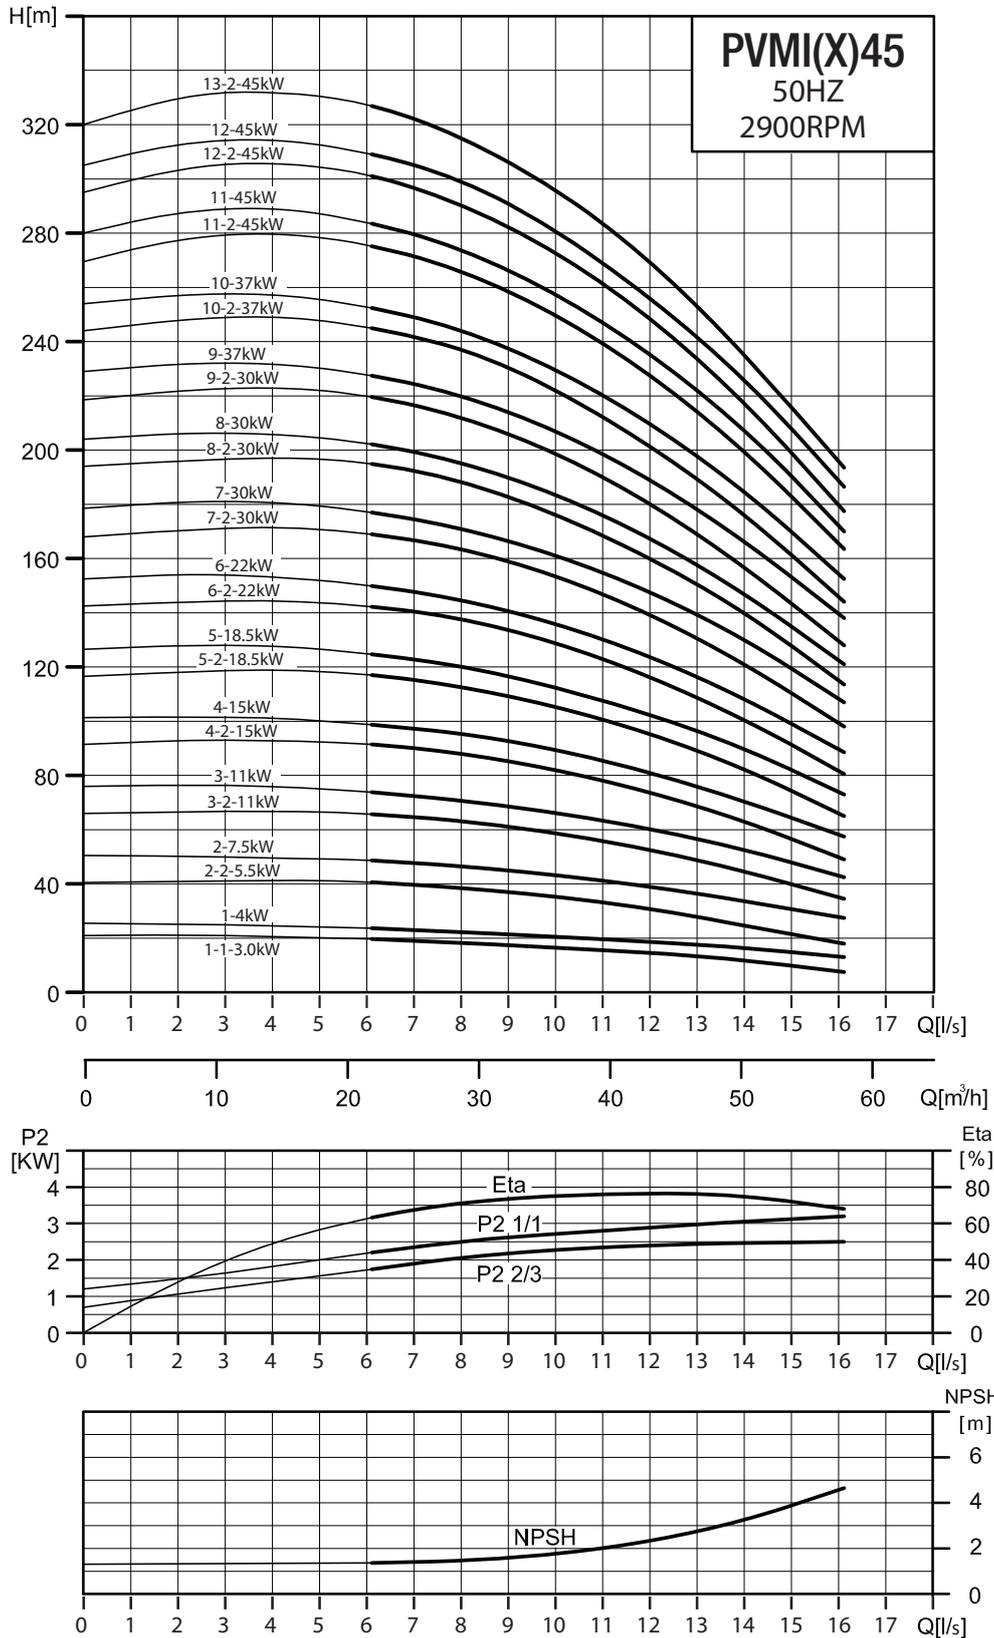

Performance to AS2417 Grade 2 for clean, cold water only.



TECHNICAL DATA

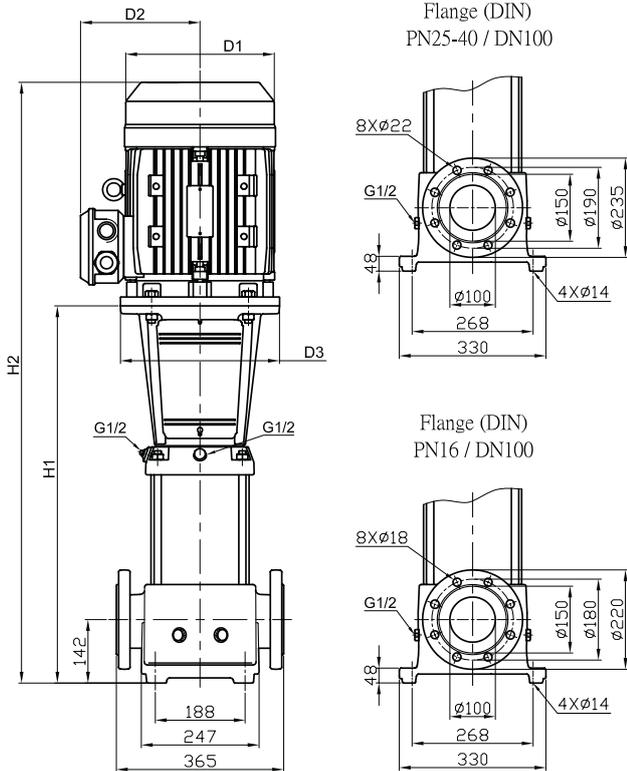


Construction Materials		PVMI	PVMX
Motor Bracket	Grey Cast Iron	ASTM 48-35B	
Top Cap	Stainless Steel	AISI 304	AISI 316
Impeller	Stainless steel	AISI 304	AISI 316
Shaft	Stainless steel	AISI 431	AISI 316
Outer Sleeve	Stainless Steel	AISI 304	AISI 316
Outer Sleeve O Ring		EPDM	
Diffuser	Stainless Steel	AISI 304	AISI 316
Neck Ring		Carbon + POB + PTFE	
Base	Stainless Steel	AISI 304	AISI 316
Base plate	Cast Iron	ASTM A48 25B	
Coupling	Ductile Iron	ASTM A530 70-50-05	
Mechanical Seal	Cartridge Type	SiC/SiC	
Pump Range PVMI/PVMX			
Nominal Flow	64m ³ /h		
Flow Range	30 - 85m ³ /h		
Maximum Head	21.8 bar		
Max. Inlet Pressure	4 bar (1-1)-(2-2) , 10 bar (2-1)-(4-2) stages 15 bar (4-1)-(8-1) stages		
Max. Operating Pressure	16 bar (1-1)-5 stages 30 bar (6-2)-(8-1)stages)		
Fluid Temperature	-15 to +120°C		
Motor			
Single Phase	220-230/240V		
Three Phase	220-240/380-415V		
Insulation	Class F		
Enclosure	IP55		
Ambient Temp	40°C		
Connections			
Flange	DIN(ISO) PN16/25/40 DN100 ANSI Class 300 NB100		

DIMENSIONS AND WEIGHTS (3 PHASE UNITS)							
Pump Type	Motor P2(kW)	Dimension (mm)					Net Weight (kg)
		H1	H2	D1	D2	D3	
PVMI 64-1-1	4.0	563	968	220	190	280	97.5
PVMI 64-1	5.5	563	993	262	210	300	116.7
PVMI 64-2-2	7.5	646	1076	262	210	300	126.7
PVMI 64-2-1 / PVMI 64-2	11.0	756	1261	314	255	350	178.2
PVMI 64-3-2 / PVMI 64-3-1	15.0	838	1343	314	255	350	190.2
PVMI 64-3	18.5	838	1398	314	255	350	204.2
PVMI 64-4-2	18.5	921	1481	314	255	350	208.1
PVMI 64-4-1 / PVMI 64-4	22.0	921	1511	348	280	350	242.1
PVMI 64-5-2 / PVMI 64-5-1	30.0	1003	1663	386	305	400	329.2
PVMI 64-5	30.0	1003	1663	386	305	400	329.2
PVMI 64-6-2	30.0	1086	1746	386	305	400	333.1
PVMI 64-6-1 / PVMI 64-6	37.0	1086	1746	386	305	400	341.1
PVMI 64-7-2 / PVMI 64-7-1	37.0	1168	1828	386	305	400	345.1
PVMI 64-7	45.0	1172	1852	432	335	400	426.1
PVMI 64-8-2 / PVMI 64-8-1	45.0	1255	1935	432	335	450	430.1

PVMI 64 Motor Data											
Power (kW)	4.0	5.5	7.5	11.0	15.0	18.5	22	30	37	45	
In (A) 1 x 240V	—	—	—	—	—	—	—	—	—	—	—
In (A) 3 x 415V	7.22	9.8	13.2	19.0	25.6	31.5	36.9	49.9	61.3	74.2	


Performance to AS2417 Grade 2 for clean, cold water only.

PERFORMANCE DATA

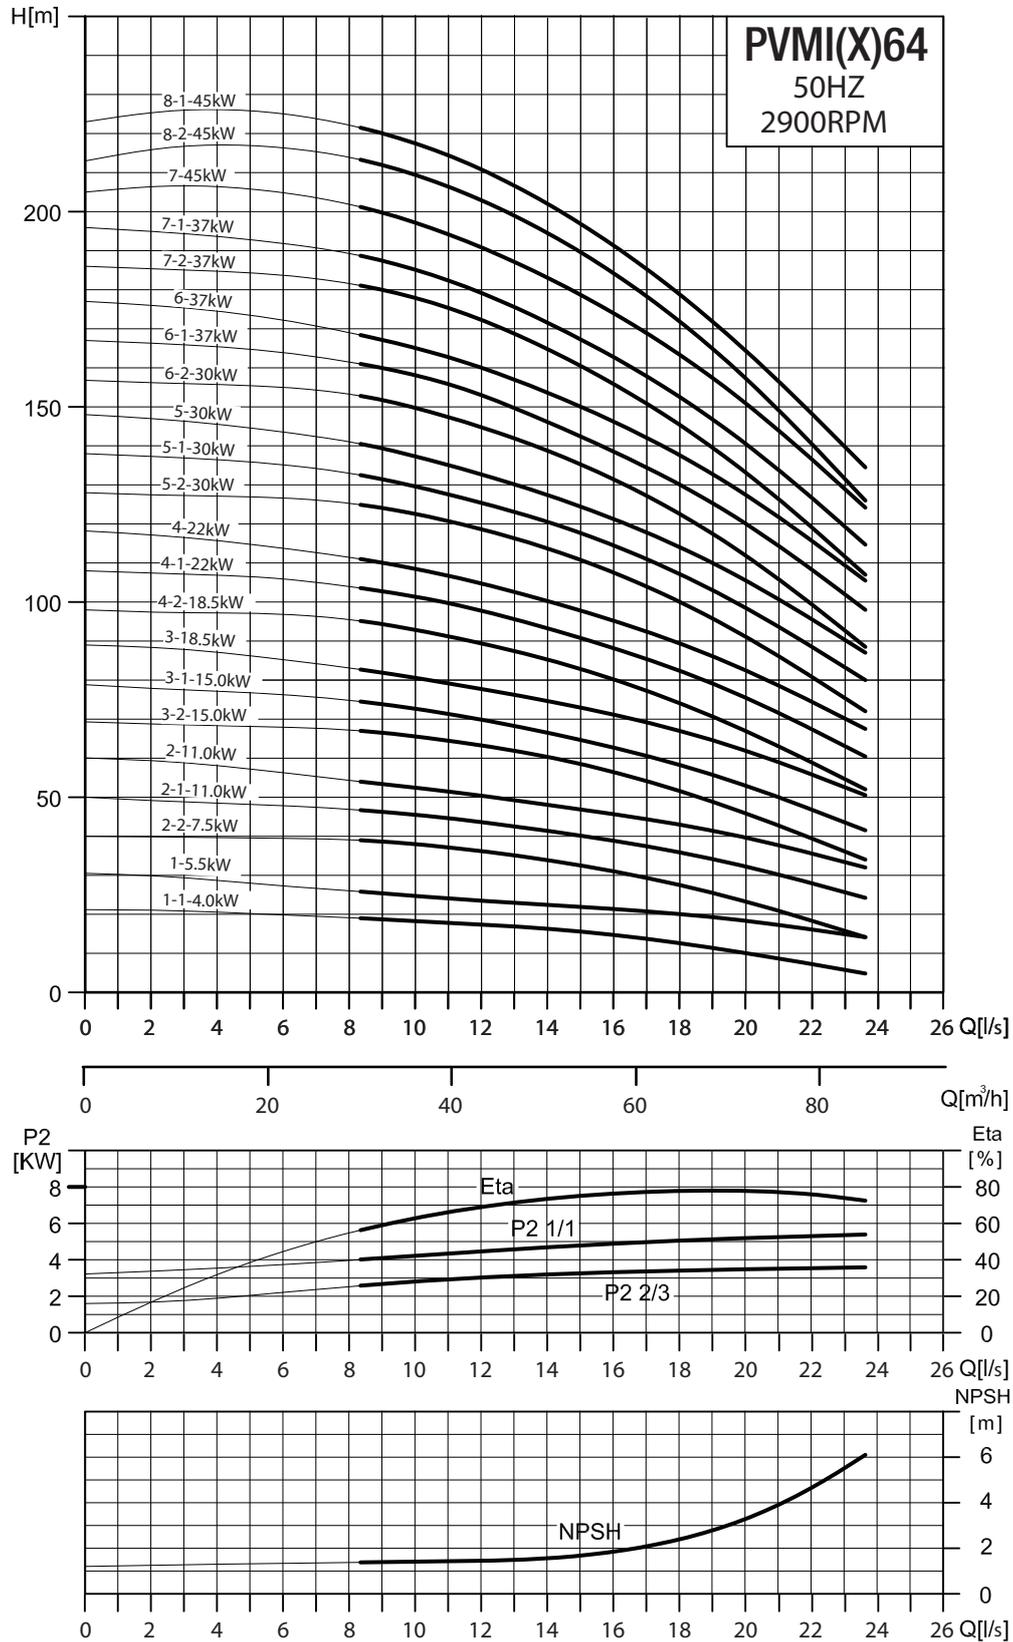

Performance to AS2417 Grade 2 for clean, cold water only.

TECHNICAL DATA

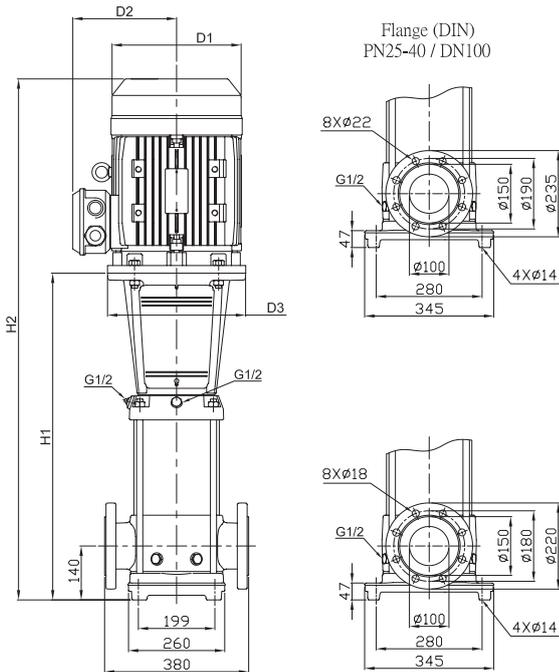

Flange (DIN - ANSI - JIS)
PN 25-40/DN100

Construction Materials		PVMI	PVMX
Motor Bracket	Ductile Iron	ASTM A530	70-50-05
Top Cap	Stainless Steel	AISI 304	AISI 316
Impeller	Stainless steel	AISI 304	AISI 316
Shaft	Stainless steel	AISI 431	AISI 316
Outer Sleeve	Stainless Steel	AISI 304	AISI 316
Outer Sleeve O Ring			EPDM
Diffuser	Stainless Steel	AISI 304	AISI 316
Neck Ring		PTFE	
Base	Stainless Steel	AISI 304	AISI 316
Base plate	Cast Iron	ASTM A48 25B	
Coupling	Fe-Cu-C	MPIF FC0525	
Mechanical Seal	Cartridge Type	SiC/SiC	
Pump Range PVMI/PVMX			
Nominal Flow	90m ³ /h		
Flow Range	35 - 110m ³ /h		
Maximum Head	20 bar		
Max. Inlet Pressure	4 bar (1-3 stgs) 10 bar (2-3.2) 15 bar (3-6 stgs)		
Max. Operating Pressure	16 bar (1-5 stages) 30 bar (6 stages)		
Fluid Temperature	-15 to +120°C		
Motor			
Three Phase	220-240/380-415V		
Insulation	Class F		
Enclosure	IP55		
Ambient Temp	40°C		
Connections			
Flange	DIN(ISO) PN25/40 DN100		




DIMENSIONS AND WEIGHTS (3 PHASE UNITS)							
Pump Type	Motor P2 (kW)	Dimension (mm)					Net Weight (kg)
		H1	H2	D1	D2	D3	
PVMI 90-1-1	5.5	576	936	234	199	300	60.30
PVMI 90-1	7.5	576	976	234	199	300	60.32
PVMI 90-2-2	11.0	778	1223	268	215	350	75.92
PVMI 90-2	15.0	778	1267	268	215	350	75.96
PVMI 90-3-2	18.5	870	1405	317	242	350	81.00
PVMI 90-3	22.0	870	1449	317	242	350	80.80
PVMI 90-4-2	30.0	962	1585	317	290	400	96.98
PVMI 90-4	30.0	962	1585	317	290	400	97.02
PVMI 90-5-2	37.0	1054	1779	398	365	400	103.82
PVMI 90-5	37.0	1054	1779	398	365	400	103.86
PVMI 90-6-2	45.0	1146	1871	398	365	450	111.66
PVMI 90-6	45.0	1146	1871	398	365	450	111.70

PVMI 90 Motor Data									
Power (kW)	5.5	7.5	11.0	15.0	18.5	22.0	30.0	37.0	45.0
In (A) 1 x 240V	—	—	—	—	—	—	—	—	—
In (A) 3 x 415V	9.8	13.2	19.0	25.6	31.5	36.9	49.9	61.3	74.2

NOTE: Check with customer service for lead time and stock availability


Performance to AS2417 Grade 2 for clean, cold water only.

PERFORMANCE DATA

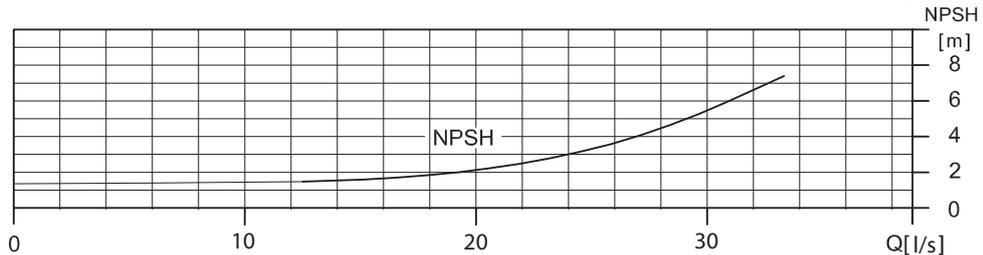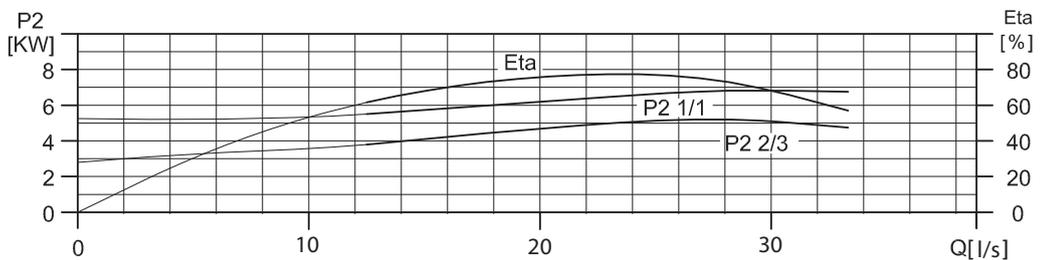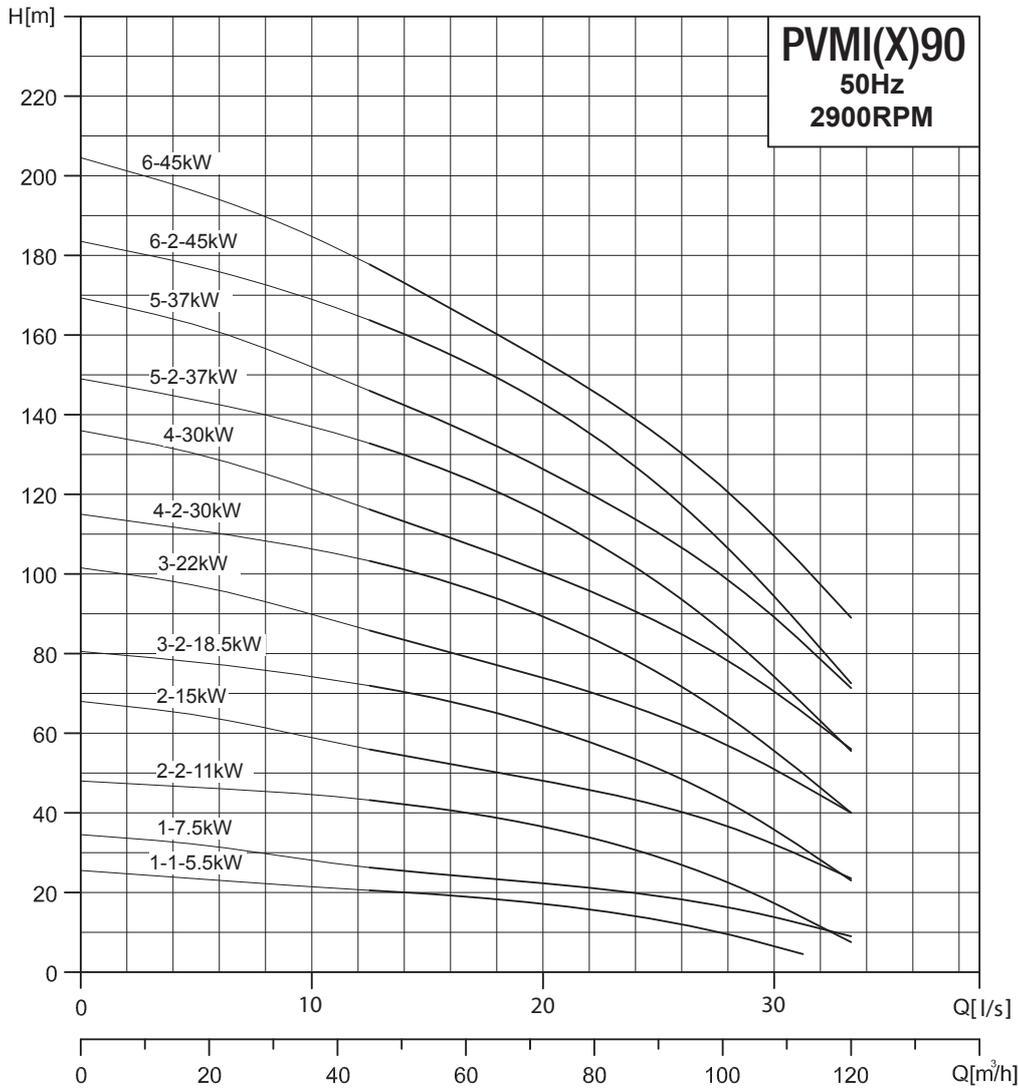

Performance to AS2417 Grade 2 for clean, cold water only.

TECHNICAL DATA

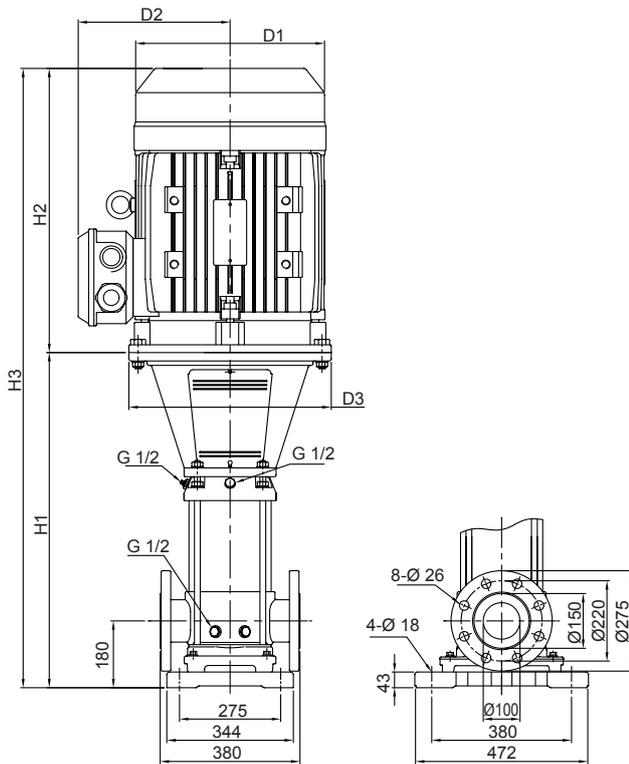

Flange (DIN - ANSI - JIS)
PN 25-40/DN125

Construction Materials		PVMI	PVMX
Motor Bracket	Ductile Iron	ASTM A530	70-50-05
Top Cap	Stainless Steel	AISI 304	AISI 316
Impeller	Stainless steel	AISI 304	AISI 316
Shaft	Stainless steel	AISI 431	AISI 316
Outer Sleeve	Stainless Steel	AISI 304	AISI 316
Outer Sleeve O Ring			EPDM
Diffuser	Stainless Steel	AISI 304	AISI 316
Neck Ring			PTFE
Base	Stainless Steel	AISI 304	AISI 316
Base plate	Cast Iron	ASTM A48 25B	
Coupling	Fe-Cu-C	MPIF FC0525	
Mechanical Seal	Cartridge Type	SiC/SiC	
Pump Range PVMI/PVMX			
Nominal Flow	120m ³ /h		
Flow Range	60 - 160m ³ /h		
Maximum Head	20 bar		
Max. Inlet Pressure	10 bar (1 stg) 15 bar (2-5 stgs) 20 bar (6-7 stgs)		
Max. Operating Pressure	30 bar		
Fluid Temperature	-15 to +120°C		
Motor			
Three Phase	220-240/380-415V		
Insulation	Class F		
Enclosure	IP55		
Ambient Temp	40°C		
Connections			
Flange	DIN(ISO) PN25/40 DN125		

DIMENSIONS AND WEIGHTS								
Pump Type	Motor (P2 (kW))	Dimension (mm)						Net Weight (kg)
		H1	H2	H3	D1	D2	D3	
PVMI120-1-1	11	834	505	1339	318	245	350	200
PVMI120-2-1	18.5	990	550	1540	318	245	350	245
PVMI120-2	22	990	580	1570	358	265	350	292
PVMI120-3	30	1145	660	1805	420	295	400	363
PVMI120-4-1	37	1301	660	1961	420	295	400	386
PVMI120-5-1	45	1460	690	2150	470	325	450	454
PVMI120-6-1	55	1642	770	2412	510	355	550	579
PVMI120-7	75	1797	845	2642	580	410	550	751


PVMI 120 Motor Data								
Power (kW)	11	18.5	22	30	37	45	55	75
In (A) 3 x 415V	19.9	33.3	38.3	51.9	63.3	75.1	91.5	123

NOTE: Check with customer service for lead time and stock availability

Performance to AS2417 Grade 2 for clean, cold water only.




PERFORMANCE DATA

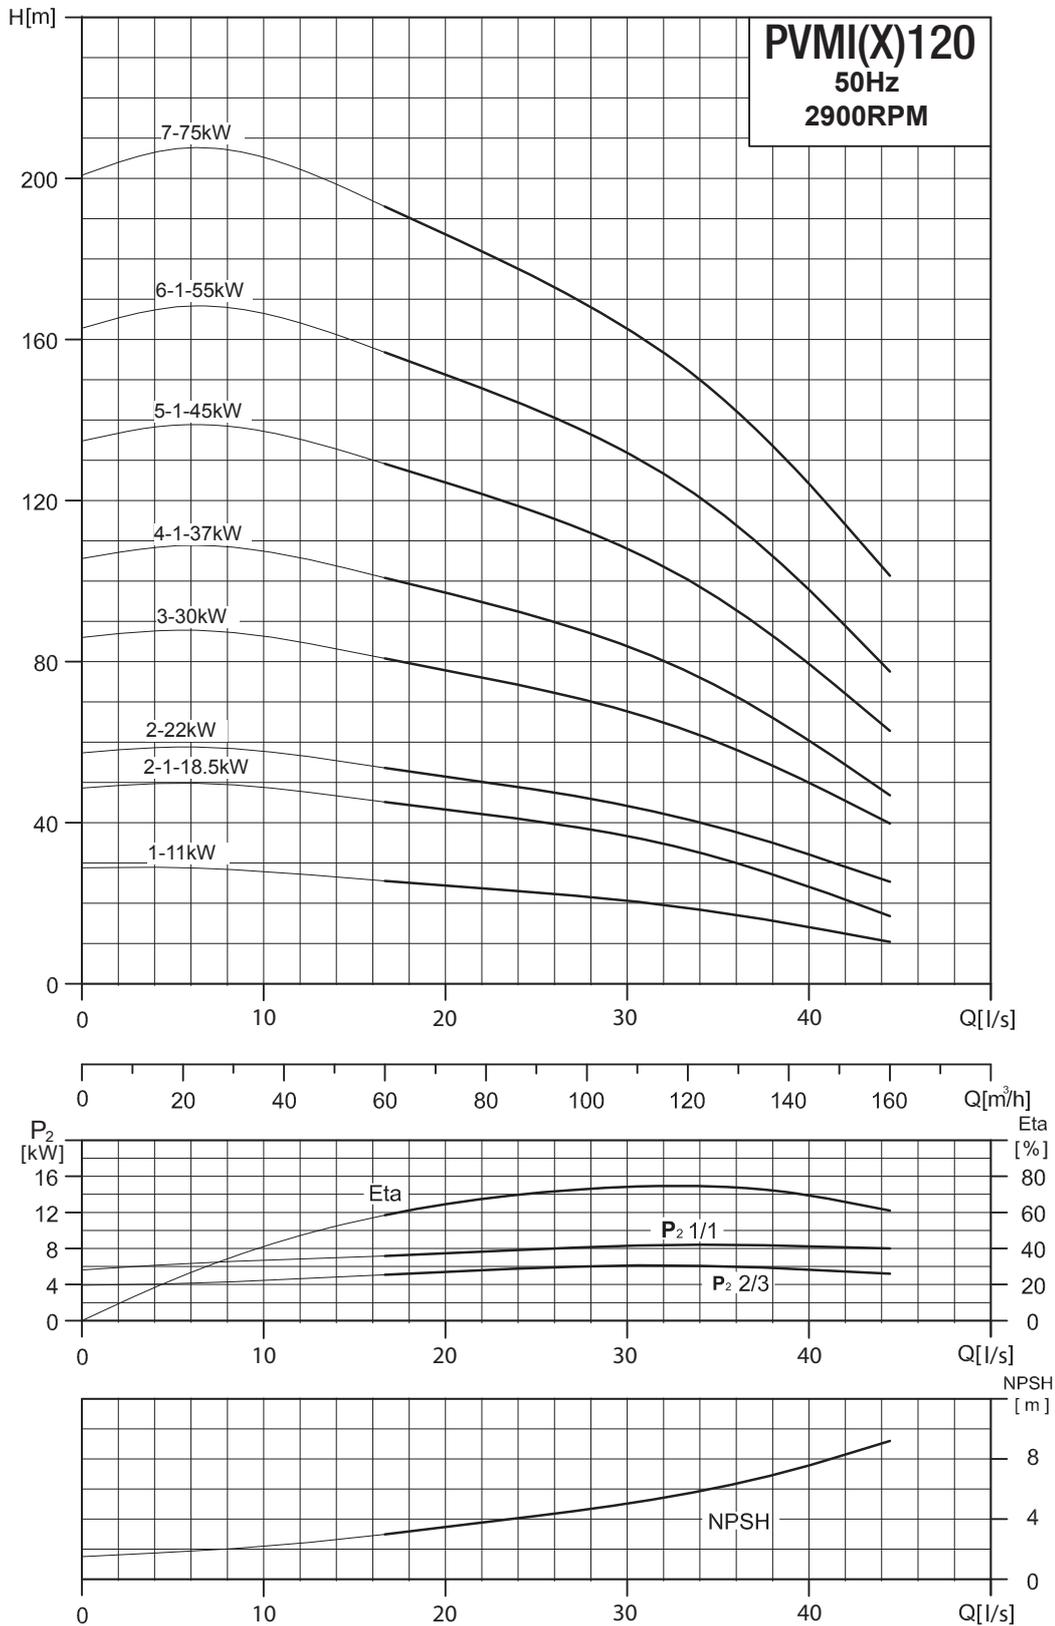

Performance to AS2417 Grade 2 for clean, cold water only.

TECHNICAL DATA

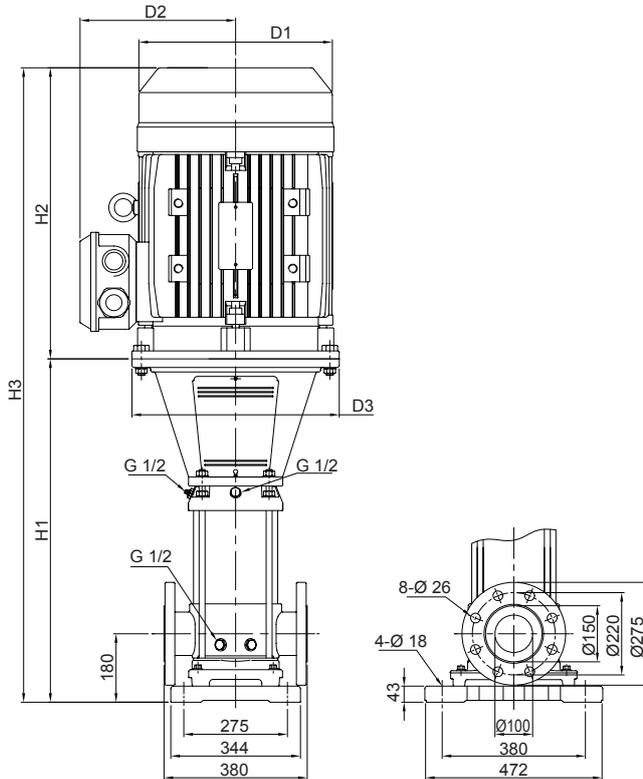

Flange (DIN - ANSI - JIS)
PN 25-40/DN125

Construction Materials		PVMI	PVMX
Motor Bracket	Ductile Iron	ASTM A530	70-50-05
Top Cap	Stainless Steel	AISI 304	AISI 316
Impeller	Stainless steel	AISI 304	AISI 316
Shaft	Stainless steel	AISI 431	AISI 316
Outer Sleeve	Stainless Steel	AISI 304	AISI 316
Outer Sleeve O Ring			EPDM
Diffuser	Stainless Steel	AISI 304	AISI 316
Neck Ring		PTFE	
Base	Stainless Steel	AISI 304	AISI 316
Base plate	Cast Iron	ASTM A48 25B	
Coupling	Fe-Cu-C	MPIF FC0525	
Mechanical Seal	Cartridge Type	SiC/SiC	
Pump Range PVMI/PVMX			
Nominal Flow	150m ³ /h		
Flow Range	75 - 180m ³ /h		
Maximum Head	19 bar		
Max. Inlet Pressure	10 bar (1 stg) 15 bar (2-4 stgs) 20 bar (5-6 stgs)		
Max. Operating Pressure	30 bar		
Fluid Temperature	-15 to +120°C		
Motor			
Three Phase	220-240/380-415V		
Insulation	Class F		
Enclosure	IP55		
Ambient Temp	40°C		
Connections			
Flange	DIN(ISO) PN25/40 DN125		

DIMENSIONS AND WEIGHTS




Pump Type	Motor (P2 (kW))	Dimension (mm)						Net Weight (kg)
		H1	H2	H3	D1	D2	D3	
PVMI150-1-1	11	834	505	1339	318	245	350	200
PVMI150-1	15	834	510	1344	318	245	350	210
PVMI150-2-1	22	990	580	1570	358	265	350	288
PVMI150-3-2	30	1145	660	1805	420	295	400	362
PVMI150-3	37	1145	660	1805	420	295	400	375
PVMI150-4-1	45	1305	690	1995	470	325	450	443
PVMI150-5-2	55	1486	770	2256	510	355	550	569
PVMI150-6	75	1642	845	2487	580	410	550	741

PVMI 150 Motor Data

Power (kW)	11	15	22	30	37	45	55	75
In (A) 3 x 415V	19.9	26.5	38.3	51.9	63.3	75.1	91.5	123

NOTE: Check with customer service for lead time and stock availability

PERFORMANCE DATA

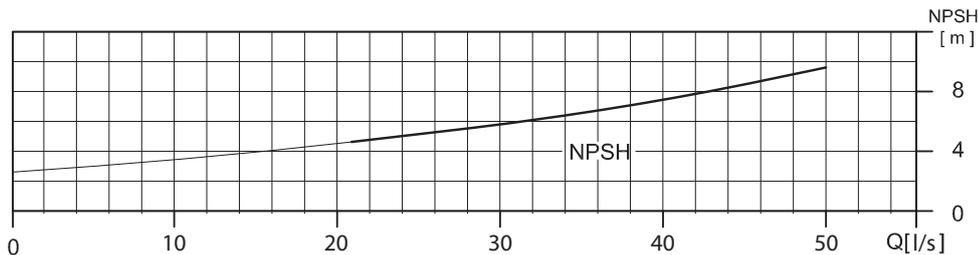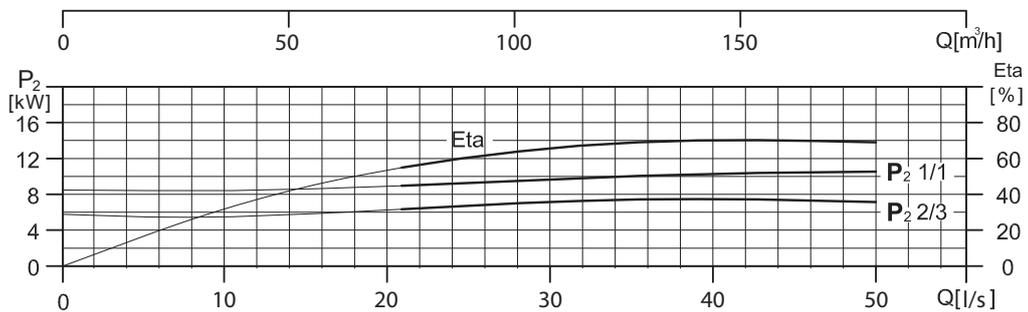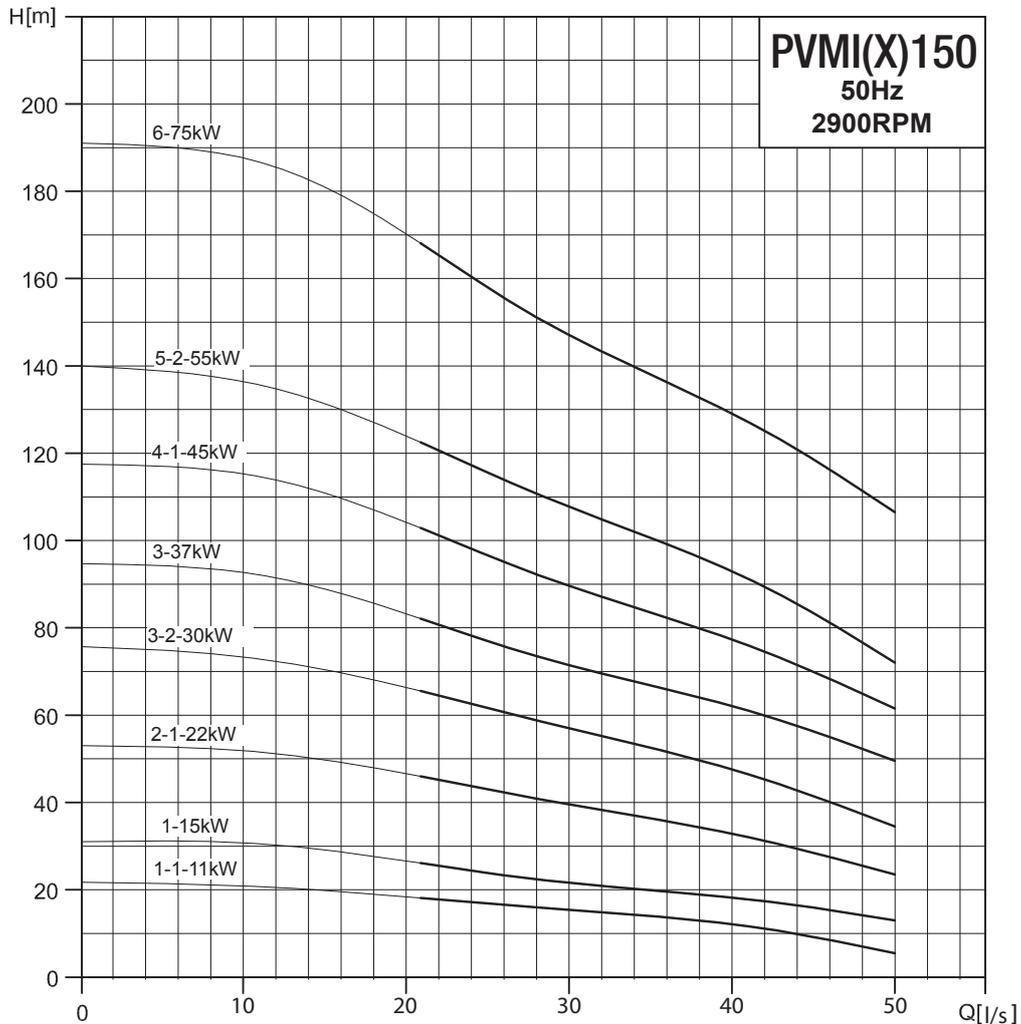

Performance to AS2417 Grade 2 for clean, cold water only.



1-21 Monash Drive,
Dandenong South, Vic 3175

Australia

National Customer Service: Phone: 1300 137 344
Fax: 1800 006 688
National Dealer Locator: Phone: 1800 664 266
Email: au.sales@pentair.com
Web: pentair.com.au, onga.com.au

International

Customer Service: Phone: +61 3 9709 5800
Fax: +61 3 9709 5888

© Information contained here-in remains the property of Pentair Australia Pty Ltd.
Any reproduction, display, publication, modification or distribution is strictly prohibited
without the prior written permission of Pentair Australia Pty Ltd.

Disclaimer:

Pentair reserves the right to change product specifications and products details.
All product images are for reference purposes only and may not represent actual and/or current product.

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and
unregistered trademarks and logos are the property of their respective owners.

© 2025 Pentair. All rights reserved.

