

TANKBUDDY SERIES

SUBMERSIBLE PRESSURE PUMP

Tankbuddy series are specifically designed for submersible operation in treated water pump-out chambers and rainwater harvesting. The Tankbuddy pumps utilise an optimised multistage hydraulic system for high performance with lower energy consumption and are suitable for clean, non-aggressive fluids as well as for fluids with suspended solids of < 2mm.



KEY INFORMATION

- Stainless steel body provides strength and superior protection against corrosion
- Precision moulded internals for high efficiency and durability
- Fully insulated cable connection chamber
- Coupled with a PressControl or iWaterSwitch, this becomes a reliable automatic pressure system with loss of prime protection
- Mechanical seal
- Inbuilt thermal overload
- Automatic operation options:
 - Integrated float switch (A-models)
 - PressControl or iWaterSwitch (W-models)



PUMP FEATURES

Ergonomic handle


Aluminum die-casting and stainless-steel pump body

New cavity to provide additional cooling, prolonging life of motor winding

New mechanical seal for better durability and ability to handle solids

New generation hydraulics with greater efficiency


New shaft design for more robust connection to impellers

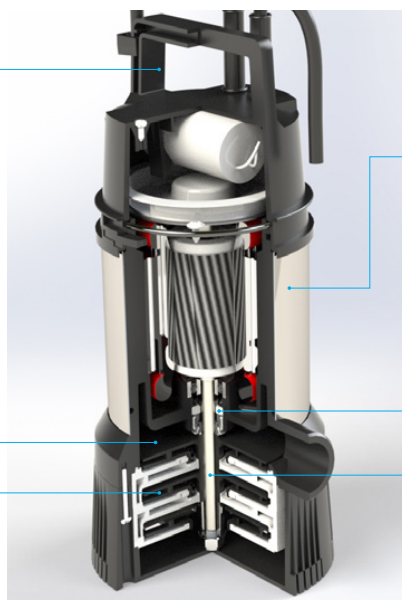


PUMP INFORMATION

	OTB330	OTB530
PART NUMBERS →	OTB330W (Manual) OTB330A (Float) OTBP330 (PressControl) OTBIW330DR (iWaterSwitch Float) OTBIW330FL (iWaterSwitch Floatless)	OTB530W (Manual) OTB530A (Float) OTBP530 (Presscontrol)
Absorbed Power (P1)	650 W	800 W
Max. Head / Pressure	33 m / 3.3 bar	35 m / 3.5 bar
Max. Flow Rate	5600 l/h	7000 l/h
Voltage / Frequency	230 V / 50 Hz	230 V / 50 Hz
Rated Current	3 A	3.8 A
Number of Impellers	3	3
Pump Body	Aluminium die casting and stainless steel	Aluminium die casting and stainless steel
Maximum Temperature of Pumped Fluid	40 °C	40 °C
Maximum Depth of Immersion	7 m	7 m
Minimum Operating Space	500 mm Diameter	500 mm Diameter
Power Cable	10 m H07 RN8-F with ANZ plug	10 m H07 RN8-F with ANZ plug
Pump Outlet	1 1/4	1 1/4
Accessories Included	Adjustable connector for hoses Ø 15, 19 and 25 mm; Float switch for OTBXXXA model	Adjustable connector for hoses Ø 15, 19 and 25 mm; Float switch for OTBXXXA model

DIMENSIONS

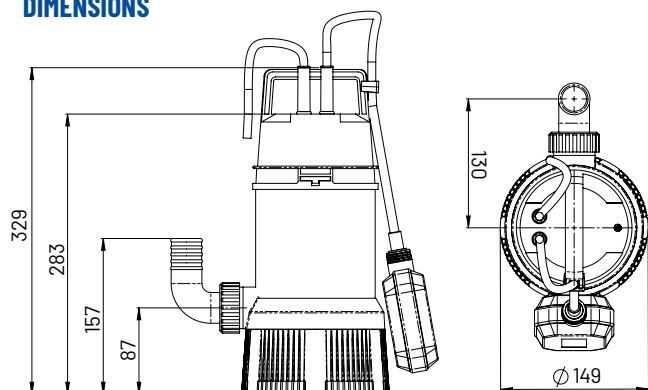

PERFORMANCE

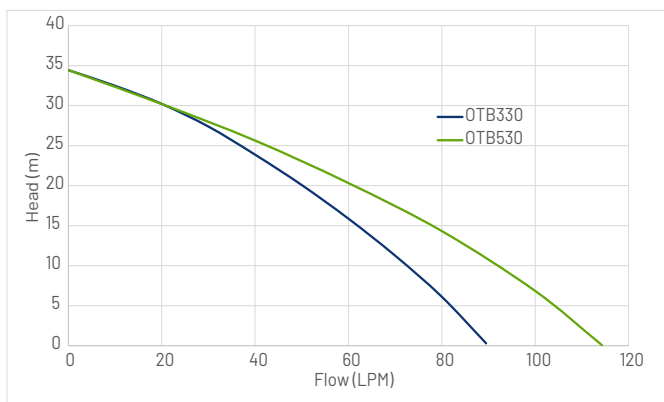

1-21 Monash Drive | Dandenong South, VIC 3175 | Australia | 1300 137 344 | onga.com.au

Information contained here-in remains the property of Pentair under Australian copyright law. Content may not be reproduced or transmitted without our prior written permission.

Disclaimer: Pentair reserves the right to change product specifications and products details. Product images are for reference purposes only and may not represent the actual/current product.

©2025 Pentair. All rights reserved.